

# Atmos Cross-Trainer

Owner's Manual / Assembly Instructions





## Corporate Headquarters

Columbia Centre III, 9525 Bryn Mawr Avenue, Rosemont, IL 60018 • U.S.A.  
847.288.3300 • FAX: 847.288.3703  
Service phone number: 800.351.3737 (toll-free within U.S.A., Canada)  
Global Website: [www.lifefitness.com](http://www.lifefitness.com)

### International Offices

#### AMERICAS

##### North America

###### Life Fitness, LLC

Columbia Centre III  
9525 Bryn Mawr Avenue  
Rosemont, IL 60018 U.S.A.  
Telephone: (847) 288 3300  
Service Email:  
[customersupport@lifefitness.com](mailto:customersupport@lifefitness.com)  
Sales/Marketing Email:  
[commercialsales@lifefitness.com](mailto:commercialsales@lifefitness.com)

##### Brazil

###### Life Fitness Brasil

Av. Rebouças, 2315  
Pinheiros  
São Paulo, SP 05401-300  
BRAZIL  
SAC: 0800 773 8282 option 2  
Telephone: +55 (11) 3095 5200 option 2  
Service Email: [suportebr@lifefitness.com](mailto:suportebr@lifefitness.com)  
Sales/Marketing Email:  
[vendasbr@lifefitness.com](mailto:vendasbr@lifefitness.com)

##### Latin America and Caribbean\*

###### Life Fitness, LLC

Columbia Centre III  
9525 Bryn Mawr Avenue  
Rosemont, IL 60018 U.S.A.  
Telephone: (847) 288 3300  
Service Email:  
[customersupport@lifefitness.com](mailto:customersupport@lifefitness.com)  
Sales/Marketing Email:  
[commercialsales@lifefitness.com](mailto:commercialsales@lifefitness.com)

#### EUROPE, MIDDLE EAST, and AFRICA (EMEA)

##### Belgium, Netherlands, and Luxemburg

###### Life Fitness (Atlantic) B.V.

Fascinatio Boulevard 230, 4<sup>th</sup> Fl - Bldg B  
3065WB, Rotterdam  
The Netherlands  
+31 88 646 6666  
Service Email:  
[service.belux@lifefitness.com](mailto:service.belux@lifefitness.com)  
Sales/Marketing Email:  
[marketing.belux@lifefitness.com](mailto:marketing.belux@lifefitness.com)

##### United Kingdom

###### Life Fitness UK LTD

Unit 109<sup>a</sup>  
Lancaster Way Business Park  
Ely, Cambs, CB6 3NX  
Telephone: General Office (+44)  
1353.666017  
Customer Support (+44) 1353.665507  
Service Email: [uk.support@lifefitness.com](mailto:uk.support@lifefitness.com)  
Sales/Marketing Email: [life@lifefitness.com](mailto:life@lifefitness.com)

##### Germany, Austria, and Switzerland

###### Life Fitness Europe GMBH

Neuhofweg 9  
85716 Unterschleißheim  
GERMANY  
Telephone:  
+49 (0) 89 / 31775166 Germany  
+43 (0) 1 / 6157198 Austria  
+41 (0) 848 / 000901 Switzerland  
Service Email:  
[kundendienst@lifefitness.com](mailto:kundendienst@lifefitness.com)  
Sales/Marketing Email:  
[vertrieb@lifefitness.com](mailto:vertrieb@lifefitness.com)

##### Spain

###### Life Fitness IBERIA

C/Frederic Mompou 5,1<sup>o</sup><sup>a</sup>  
08960 Sant Just Desvern Barcelona  
SPAIN  
Telephone: (+34) 93.672.4660  
Service Email:  
[servicio.tecnico@lifefitness.com](mailto:servicio.tecnico@lifefitness.com)  
Sales/Marketing Email:  
[info.iberia@lifefitness.com](mailto:info.iberia@lifefitness.com)

#### All Other EMEA Countries and Distributor Business EMEA\*

###### Life Fitness (Atlantic) B.V.

Fascinatio Boulevard 230, 4<sup>th</sup> Fl - Bldg B  
3065WB, Rotterdam  
The Netherlands  
+31 88 646 6666  
Service Email:  
[emeaservicesupport@lifefitness.com](mailto:emeaservicesupport@lifefitness.com)

#### ASIA PACIFIC (AP)

##### Japan

###### Life Fitness Japan, Ltd

4-17-33 Minami Aoyama 1F/B1F  
Minato-ku - Tokyo 107-0062  
Japan  
Telephone: (+81) 0120.114.482  
Fax: (+81) 03-5770-5059  
Service Email: [service.lfj@lifefitness.com](mailto:service.lfj@lifefitness.com)  
Sales/Marketing Email:  
[sales@lifefitnessjapan.com](mailto:sales@lifefitnessjapan.com)

##### Hong Kong

###### Life Fitness Asia Pacific LTD

26/F, Global Trade Square  
21 Wong Chuk Hang Road  
Wong Chuk Hang  
Hong Kong  
Telephone: (+852) 25756262  
Fax: (+852) 25756894  
Service Email: [service.hk@lifefitness.com](mailto:service.hk@lifefitness.com)  
Sales/Marketing Email:  
[marketing.hk.asia@lifefitness.com](mailto:marketing.hk.asia@lifefitness.com)

#### All Other Asia Pacific countries and distributor business Asia Pacific\*

###### Life Fitness Asia Pacific LTD

26/F, Global Trade Square  
21 Wong Chuk Hang Road  
Wong Chuk Hang  
Hong Kong  
Telephone: (+852) 25756262  
Fax: (+852) 25756894  
Service Email: [service.ap@lifefitness.com](mailto:service.ap@lifefitness.com)  
Sales/Marketing Email:  
[marketing.hk.asia@lifefitness.com](mailto:marketing.hk.asia@lifefitness.com)

\*Also check [www.lifefitness.com](http://www.lifefitness.com) for local representation or distributor/dealer

## User and Service Documents Link

---

<https://fn.fit/KnowledgeBase>

<https://fn.fit/PartStore>

Additional information is available online using the links above.

تتوفر معلومات إضافية على الإنترنت باستخدام الرابط أعلاه.

点击上面的链接可在线获取更多信息。

Flere oplysninger er tilgængelige online gennem linket ovenfor.

Bijkomende informatie is online beschikbaar via bovenstaande link.

Vous trouverez plus d'informations en ligne à l'aide du lien ci-dessus.

Zusätzliche Informationen finden Sie online über den oben angegebenen Link.

Ulteriori informazioni sono disponibili online utilizzando il link sopra riportato.

追加情報は上記リンクを使用してオンラインで利用可能です。

상기 링크를 통해 온라인에서 추가 정보를 볼 수 있습니다.

Informações adicionais estão disponíveis on-line, através do link acima.

Дополнительная информация доступна в интернете по ссылке, указанной выше.

Mediante el enlace anterior podrá acceder a información adicional en línea.

Ytterligare information finns online genom att använda länken ovan.

İnternet üzerinden daha fazla bilgi edinmek için yukarıdaki bağlantıyı kullanabilirsiniz.

هناك معلومات إضافية متاحة على الإنترنت باستخدام الرابط أعلاه.

Informazio osagarria eskuragarri dago goiko estekaren bidez.

Допълнителна информация можете да намерите онлайн, като използвате връзката по-горе.

Mitjançant l'enllaç anterior podreu accedir a informació addicional en línia.

使用上面的連結線上提供額外資訊。

Dodatne informacije možete pronaći na internetu sljedeći vezu iznad.

ከላይ የተመጠውን አገናኝ(ሊንክ) በመጠቀም መረጃዎች አንላይን ያገኛሉ።

Lisätietoja on saatavissa verkosta käyttämällä yllä olevaa linkkiä.

Wubetumi anya nsem afoforo aka ho wa websait so denam asem a ewo atifi ho a wubemia so so.

Πρόσθετες πληροφορίες είναι διαθέσιμες online χρησιμοποιώντας το σύνδεσμο παραπάνω.

מידע נוסף אפשר לקבל באינטרנט באמצעות הקישור לעיל.

További információ elérhető online, a fenti hivatkozás segítségével.

Viðbótarupplýsingar eru fáanlegar á netinu með því að smella á tengilinn hér fyrir ofan.

Plus indicium per superum situm potes invenire.

മുകളിലുള്ള ലിങ്ക് ഉപയോഗിച്ച് ഓൺലൈനിൽ കൂടുതൽ വിവരങ്ങൾ ലഭ്യമാണ്.

Ytterligere informasjon er tilgjengelig på nettet via linken ovenfor.

Dodatkowe informacje są dostępne online pod powyższym odnośnikiem.

Informações adicionais estão disponíveis online a usar o link acima.

Informații suplimentare sunt disponibile online, utilizând link-ul de mai sus.

Dodatne informacije dostupne su na mreži putem gornjeg linka.

Ďalšie informácie sú dostupné online na vyššie uvedenom odkaze.

# Table of Contents

## Additional Information

<a href="#">Link to Additional Information Online</a> .....	6
---	---

## Getting Started

<a href="#">Safety Instructions</a> .....	7
<a href="#">Consignes de Sécurité</a> .....	9
<a href="#">Where to Place and How to Stabilize the Cross-Trainer</a> .....	11
<a href="#">Electrical Power Requirements (Applicable for Units Using External Power Supply)</a> .....	12
<a href="#">Check for Console Power</a> .....	12
<a href="#">Power Assist Option / External Power Supply</a> .....	12

## Product Overview

<a href="#">Product Features</a> .....	13
<a href="#">Product Labels</a> .....	14
<a href="#">Label Locations</a> .....	14
<a href="#">Connections</a> .....	14
<a href="#">How to use the Cross-Trainer</a> .....	15
<a href="#">Mounting and Dismounting the Cross-Trainer</a> .....	15

## Assembly

<a href="#">Link to Additional Information Online</a> .....	16
<a href="#">Hardware</a> .....	17
<a href="#">Tools Required</a> .....	18
<a href="#">Assembly Procedure</a> .....	18

## Specifications

<a href="#">Product Specifications</a> .....	31
--	----

## Service and Technical Data

<a href="#">Preventive Maintenance Tips</a> .....	32
<a href="#">Approved and Compatible Cleaners</a> .....	32
<a href="#">Preventive Maintenance Schedule</a> .....	33
<a href="#">Troubleshooting the Polar® Heart Rate Chest Strap</a> .....	33
<a href="#">Recycle the Battery - SL Console</a> .....	33
<a href="#">How To's</a> .....	33
<a href="#">Software Updates</a> .....	34

## Warranty

<a href="#">Warranty Information</a> .....	35
--	----

## Release Notes

<a href="#">Updates to Manual</a> .....	36
---	----

Life Fitness® is a registered trademark.

Gym Wipes® is a registered trademark of the 2XL Corporation. PureGreen 24 is a trademark of Pure Green. Polar® is a registered trademark of Polar Electro Inc.

© Copyright 2026, Life Fitness, LLC. All Rights Reserved. Life Fitness, Hammer Strength, Cybex, ICG and SCIFIT are registered trademarks of Life Fitness, LLC and its affiliated companies and subsidiaries. Disclaimer: Images and specifications are current as of the date of publication and are subject to change.

Columbia Center III - 9525 Bryn Mawr Ave., Rosemont, IL 60018 • 847-288-3300

[www.lifefitness.com](http://www.lifefitness.com) • 1028281-0001 AB • 2026

# 1. Additional Information

## Link to Additional Information Online

In addition to the content provided in this manual, please scan the QR code for further and updated information.

Life Fitness Atmos Cross-Trainer










<https://fn.fit/AtmosXinstall>

# 2. Getting Started





## Safety Instructions

Owner of the equipment is responsible for providing the users of the equipment with all warnings and instructions.

 Read all instructions before use.


-  **CAUTION:** Any changes or modifications to this equipment could void the product warranty.
-  **WARNING:** Health-related injuries may result from incorrect or excessive use of exercise equipment. Life Fitness STRONGLY recommends seeing a physician for a complete medical exam before undertaking an exercise program, particularly if the user has a family history of high blood pressure or heart disease, is over the age of 45, smokes, has high cholesterol, is obese, or has not exercised regularly in the past year. If, at any time while exercising, the user experiences faintness, dizziness, pain, or shortness of breath, he or she must stop immediately.
-  **WARNING:** To reduce the risk of burns, fire, electric shock, or injury, it is imperative to connect each product to a properly grounded electrical outlet.
-  **WARNING:** Heart rate monitoring systems may be inaccurate. Over exercising may result in serious injury or death. If you feel faint, stop exercising immediately.
-  **WARNING:** Do not use for stretching and do not attach straps or other devices.
-  **WARNING:** Keep batteries out of reach of children.

Some chest straps may contain a removable battery.

- Swallowing may lead to serious injury in as little as 2 hours or death, due to chemical burns and potential perforation of the esophagus.
- If you suspect your child has swallowed a battery, immediately call your local poison control for fast, expert advice.
- Examine devices and make sure the battery compartment is correctly secured, e.g. that the screw or other mechanical fastener is tightened. Do not use if compartment is not secure.
- Dispose of used button batteries immediately and safely. Flat batteries can still be dangerous.
- Tell others about the risk associated with button batteries and how to keep their children safe.
-  **WARNING:** Ensure that there is at least 1 ft. / 0.3 m of clearance in front of the Cross-Trainer and at least 2 ft. / 0.6 m on the side.
-  **WARNING:** The Cross-Trainer is not equipped with a free-wheeling feature. Therefore, the product cannot be stopped immediately.
-  **WARNING:** This product can expose you to chemicals including 1,3-butadiene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
-  **DANGER:** To reduce the risk of electrical shock or injury from moving parts, always unplug product before cleaning or attempting any maintenance activity.
- Life Fitness does not warrant nor guarantee that component parts used in the manufacture of products offered under the Life Fitness brand are latex-free. Users of these products must take all necessary precautions to prevent accidental contact that could lead to an adverse latex reaction.
- Never operate the product if it has a damaged power cord or electrical plug, or if it has been dropped, damaged, or even partially immersed in water. Contact Customer Support Services.
- Position the product so that the power cord plug to the wall is accessible to the user. Make sure that the power cord is not knotted or twisted and that it is not trapped under any equipment or other objects.
- If the electrical supply cord is damaged, it must be replaced by the manufacturer, an authorized service agent, or a similarly qualified person to avoid a hazard.
- Always follow the console instructions for proper operation.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience or knowledge unless they have supervision or been given instruction concerning the use of the appliance by a person responsible for their safety.
- Do not use this product outdoors, near swimming pools or in areas of high humidity.
- Never operate the product with the air openings blocked. Keep air openings free of lint, hair, or any other obstructing material.
- Never insert objects into any opening in these products. If an object should drop inside, turn off the power, unplug the power cord from the outlet, and carefully retrieve it. If the item cannot be reached, contact Customer Support Services.
- Never place liquids of any type directly on the unit, except in an accessory tray or holder. Containers with lids are recommended.

- Do not use these products in bare feet. Always wear shoes. Wear shoes with rubber or high-traction soles. Do not use shoes with heels, leather soles, cleats or spikes. Make sure no stones are embedded in the soles.
- Keep all loose clothing, shoelaces, and towels away from moving parts.
- Do not reach into, or underneath, the unit or tip it on its side during operation.
- This equipment is not intended for use by children. Keep children under the age of 14 away from the machine.
- Do not allow other people to interfere in any way with the user or equipment during a workout.
- Allow LCD consoles to “normalize” with respect to temperature for one hour before plugging the unit in and using.
- When the product is not in use, Life Fitness recommends unplugging the product. Disconnect from the electrical outlet when not in use, and before putting on or taking off parts.
- Use these products for their intended use as described in this manual. Do not use attachments that have not been recommended by the manufacturer.
- Free standing equipment shall be positioned on a flat, stable and horizontal base.
- Do not stand or sit on the rear plastic covers of the Cross-Trainer.
- Do not stand on center tube of the Cross-Trainer.
- The individual human power required to perform an exercise may be different than the mechanical power displayed on the Cross-Trainer.
- Never face backward while using the Cross-Trainer.
- Use caution when mounting or dismounting the Cross-Trainer. Before mounting, use the moving arms to bring the pedal nearest to you to the lowest position. Use the stationary handlebars whenever additional stability is required. While exercising, hold onto the moving arms.
- Read all warnings on each product prior to starting a workout.
- If warnings are missing or damaged, please contact Customer Support Services immediately for replacement warning labels. Warning labels are shipped with every product and should be installed before product is used. Life Fitness is not responsible for missing or damaged warning labels.

## Consignes de Sécurité

 Veuillez lire toutes les instructions avant usage.

**⚠ ATTENTION :** Toute modification apportée à cet équipement pourrait en annuler la garantie.

**⚠ AVERTISSEMENT :** Des problèmes de santé peuvent survenir en cas d'une utilisation incorrecte ou excessive de l'équipement. Life Fitness Recommande VIVEMENT aux utilisateurs de passer un examen médical complet avant d'entamer un programme d'entraînement, et tout particulièrement dans les cas suivants : antécédents familiaux d'hypertension (pression sanguine trop élevée) ou de pathologies cardiaques, utilisateurs de 45 ans ou plus, tabagisme, hypercholestérolémie (taux de cholestérol sanguin trop élevé), obésité, absence d'exercice physique depuis un an ou plus. Si, pendant l'usage de l'appareil, l'utilisateur éprouve un malaise, des vertiges, des douleurs ou des difficultés à respirer, il doit s'arrêter immédiatement.

**⚠ AVERTISSEMENT :** Pour réduire les risques de brûlures, d'incendies, de décharges électriques ou de blessures, il est essentiel de brancher chaque appareil sur une prise électrique correctement mise à la terre.

**⚠ AVERTISSEMENT :** Les systèmes de surveillance de la fréquence cardiaque peuvent être inexacts. Un exercice trop intensif peut entraîner des blessures graves, voire mortelles. En cas de malaise, interrompez immédiatement la séance d'entraînement.

**⚠ AVERTISSEMENT :** Ne pas utiliser pour des étirements et ne pas y attacher des sangles ou autres dispositifs.

**⚠ AVERTISSEMENT :** Tenir les piles hors de portée des enfants.

Certaines sangles de poitrine peuvent contenir une pile jetable.

- L'ingestion de la pile peut provoquer des blessures graves voire la mort en moins de 2 heures en raison du risque de brûlures chimiques et de perforation de l'œsophage.
- Si vous pensez que votre enfant a avalé une pile, contactez immédiatement le centre anti-poison local pour obtenir des conseils spécifiques.
- Contrôlez l'appareil et assurez-vous que le compartiment pour pile est bien fermé, par exemple que la vis ou toute autre fixation mécanique est bien serrée. Ne pas utiliser le produit si le compartiment n'est pas bien fermé.
- Éliminer les piles bouton immédiatement et de manière sûre. Les piles bouton sont une source de danger.
- Informez les tiers des risques associés aux piles bouton et de la manière dont ils doivent agir pour protéger leurs enfants.

**⚠ AVERTISSEMENT :** Veillez à laisser un dégagement d'au moins 30 cm (1 pied) devant le Cross-Trainer et d'au moins 60 cm (2 pieds) sur les côtés.

**⚠ AVERTISSEMENT :** Le Cross-Trainer n'est pas équipé d'une option roue libre. Par conséquent, il ne peut être arrêté instantanément.


**⚠ DANGER :** Pour réduire les risques de chocs électriques ou de blessures en raison des pièces mobiles, débranchez toujours les produits avant de les nettoyer ou de procéder aux tâches d'entretien.

- Life Fitness ne garantit pas que les composants utilisés dans la fabrication des produits proposés dans la bande Life Fitness sont exempts de latex. Les utilisateurs de ces produits doivent prendre toutes les précautions nécessaires pour éviter un contact accidentel qui pourrait entraîner une réaction indésirable au latex.
- Ne faites jamais fonctionner le produit dont la fiche ou le cordon d'alimentation sont altérés ni aucun appareil qui serait tombé, aurait été endommagé ou même partiellement plongé dans l'eau. Contactez le service à la clientèle.
- Placez l'appareil de façon à ce que l'utilisateur ait accès à la fiche du cordon d'alimentation. Assurez-vous que le cordon d'alimentation n'est pas noué ou tordu et qu'il n'est pas coincé sous un autre appareil ou sous tout autre objet.
- Si le cordon d'alimentation électrique est endommagé, il doit être remplacé par le fabricant, par un réparateur agréé ou par une personne qualifiée afin d'éviter tout danger.
- Pour un fonctionnement correct, suivez toujours les instructions de la console.
- Cet appareil n'est pas destiné à être utilisé par des personnes ou des enfants présentant des capacités physiques, sensorielles ou mentales réduites, ou un manque d'expérience et de connaissances, sauf en cas de supervision ou d'instructions relatives à son utilisation par une personne responsable de leur sécurité.
- N'utilisez pas ce produit à l'extérieur, près d'une piscine ou dans des endroits très humides.
- N'utilisez jamais le produit avec les ouvertures d'air bloquées. Maintenez les bouches d'aération exemptes de peluches, de cheveux ou de toute autre obstruction.
- N'introduisez jamais d'objet dans les ouvertures de cet appareil. Si un objet tombe dans l'appareil, mettez ce dernier hors tension, débranchez le cordon d'alimentation et récupérez l'objet avec précaution. Si vous ne pouvez pas l'atteindre, contactez le service d'assistance à la clientèle.
- Ne placez jamais de liquides d'aucune sorte directement sur l'appareil, sauf si vous disposez d'un support ou d'un plateau pour accessoires. Nous vous recommandons de n'utiliser que des récipients pourvus d'un couvercle.

- N'utilisez pas ces produits avec les pieds nus. Portez toujours des chaussures. Portez des chaussures à semelles en caoutchouc ou antidérapantes. N'utilisez pas de chaussures à talon, à semelle en cuir, à crampons ou à pointes. Assurez-vous qu'aucun caillou ne s'est incrusté dans les semelles.
- Éloignez les vêtements amples, les lacets de chaussure et les serviettes des parties mobiles de l'appareil.
- Ne placez pas les mains à l'intérieur ou sous l'appareil. Ne le faites pas basculer sur le côté durant son fonctionnement.
- Cet équipement n'est pas destiné à être utilisé par les enfants. Tenez les enfants âgés de moins de 14 ans à l'écart de la machine.
- Ne laissez aucune personne gêner l'utilisateur ou le fonctionnement de l'appareil pendant l'exercice.
- Laissez les consoles LCD s'adapter à la température ambiante pendant une heure avant de brancher l'appareil et de l'utiliser.
- Life Fitness recommande de débrancher le produit quand il n'est pas utilisé. Débranchez-le systématiquement après son utilisation et avant l'ajout et le retrait de pièces.
- Utilisez cet équipement uniquement aux fins auxquelles il est destiné et de la manière décrite dans le présent manuel. N'utilisez pas d'accessoires non recommandés par le fabricant.
- L'appareil utilisé de manière autonome doit être installé sur une surface stable et plane.
- Ne vous mettez pas debout ni assis sur les caches en plastique situés à l'arrière du Cross-Trainer.
- Ne vous mettez pas debout sur le tube central du Cross-Trainer.
- La puissance nécessaire à chaque utilisateur pour effectuer un exercice peut différer de la puissance mécanique affichée sur le Cross-Trainer.
- Ne montez jamais à l'envers sur le Cross-Trainer.
- Montez et descendez du Cross-Trainer avec la plus grande précaution. Avant de monter, placez la pédale située de votre côté en position basse, en vous aidant des bras mobiles. Utilisez les poignées fixes lorsque vous avez besoin de renforcer votre équilibre. Pendant les exercices, tenez les bras mobiles.
- Lisez les avertissements sur chaque produit avant de commencer à vous entraîner.
- Si certaines étiquettes d'avertissement sont manquantes ou endommagées, contactez immédiatement le service d'assistance à la clientèle. Nous vous en fournirons de nouvelles. Les étiquettes d'avertissement sont expédiées avec les appareils et doivent être installées avant utilisation de ces derniers. Life Fitness n'est pas responsable des étiquettes manquantes ou endommagées.


## Where to Place and How to Stabilize the Cross-Trainer

Read the entire manual before setting up the cross-trainer. After following all Safety Instructions, move the unit to the location where it will be used. Allow 1 ft. (0.3 m) of clearance in front of the cross-trainer and at least 2 ft. (0.6 m) on the side. It should be easy to mount the cross-trainer from the side.

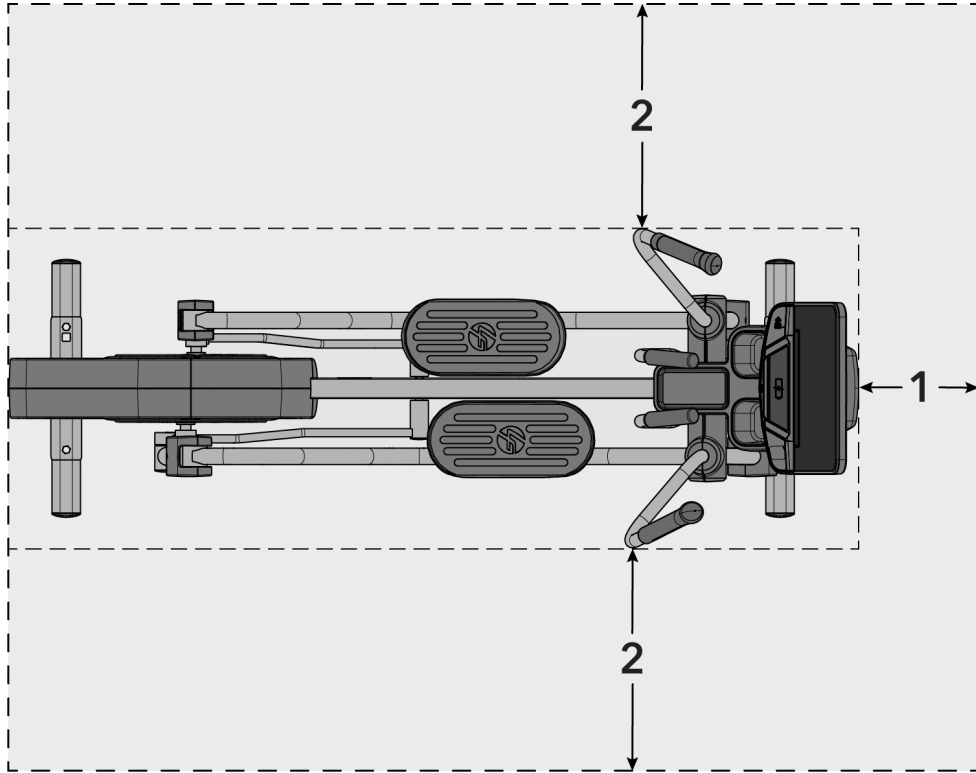

1	1 ft. / 0.3 m
2	2 ft. / 0.6 m

After placing the unit in position, check the unit's stability by attempting to rock it from side to side. Any slight rocking indicates that the unit must be leveled. Determine which foot is not resting completely on the floor. Loosen the jam nut with an open-end 17mm wrench and rotate the leg leveler to lower it. Verify that the unit is stable. Repeat the adjustment as necessary until the unit no longer rocks. Lock the adjustment by tightening the jam nut against the stabilizing bar.

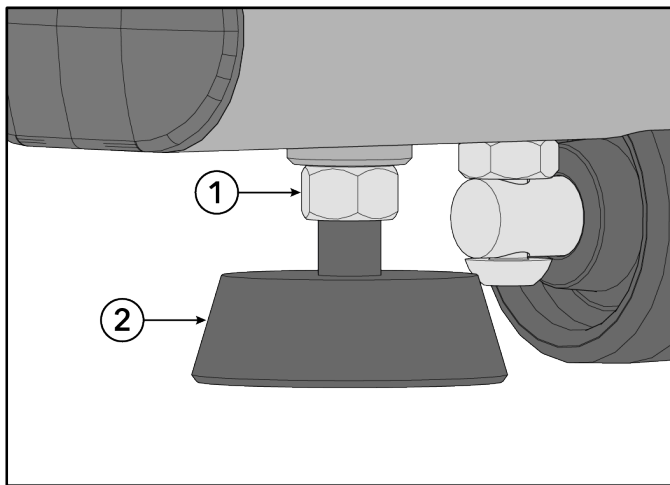

Item	Description	Qty.
1	Jam Nut	4
2	Leg Leveler	4

## Electrical Power Requirements (Applicable for Units Using External Power Supply)

- Units that are equipped with SL Consoles are self powered. An optional external power supply brick is available for purchase if desired.
- Units with SE4 Consoles require a 24 VDC power supply.

**⚠ WARNING:** Use only the supplied power brick and line cord. Do not use any modification to connect to a 2-prong outlet. Product must be connected to a properly rated 3-prong outlet.

Console	Supply Voltage	Frequency	Output Voltage	Output Current
SL	95 - 264 VAC	47 - 63 Hz	24 VDC	2.5 A
SE4	95 - 264 VAC	47 - 63 Hz	24 VDC	3.75 A

Outlet Voltage	Commercial Units Outlet & Breaker (Amps)	Consumer / Home Units Outlet & Breaker (Amps)
120 VAC	20 (no more than 8 cross-trainers per breaker for SL; 4 bikes per breaker for SE4)	15 (no more than 8 cross-trainers per breaker for SL; 4 cross-trainers per breaker for SE4)
230 VAC	12 (no more than 8 cross-trainers per breaker for SL; 4 cross-trainers per breaker for SE4)	12 (no more than 8 cross-trainers per breaker for SL; 4 cross-trainers per breaker for SE4)

**NOTE:** Do not modify the plug provided with this product. If the plug does not fit into an available electrical outlet, have a proper outlet installed by a qualified electrician.

**NOTE:** Make sure the power brick cord is securely connected to the base unit. A loose connection may result in the unit not receiving external power.

### Check for Console Power

The SL Console is powered by a rechargeable 6-volt battery. Check the battery by pressing the GO button. The console should beep and light up. The console will display the Life Fitness logo. If a prompt doesn't appear, mount the unit and begin pedaling. The console should light up and programming a workout should be possible. Pedal for 10 - 20 minutes at 50 rpm or faster during a workout for optimum battery charging. The pedal action during workouts keeps the battery charged. Optional external power supply can be used. If the unit is externally powered, battery maintenance is automatic and pedaling is not required. Use only the power supply provided by Life Fitness to insure against unsafe operation.

### Power Assist Option / External Power Supply

The cross-trainer's optional Power Assist feature makes it possible for the console to be powered by an external electrical source. This eliminates the need to pedal at a minimum speed to supply constant power to the console. With this option, users who use the cross-trainer for rehabilitative exercise may pedal at a rate below the minimum without losing console power.


Plug the power to the external power connector on the front end of the cross-trainer. Plug the cord into an AC outlet. Use only the external power supply provided by Life Fitness in order to insure against unsafe operation.

**⚠ CAUTION:** Connectors should easily fit into the receptacles. Forcing a connection may lead to damage to the barrel connector and/or receptacle and may void product warranty. If the power supply barrel doesn't fit easily into the receptacle then the wrong power supply is being used.

The Power Assist feature option requires an optional kit. Contact Life Fitness Customer Support Services to order the kit.

# 3. Product Overview

## Product Features

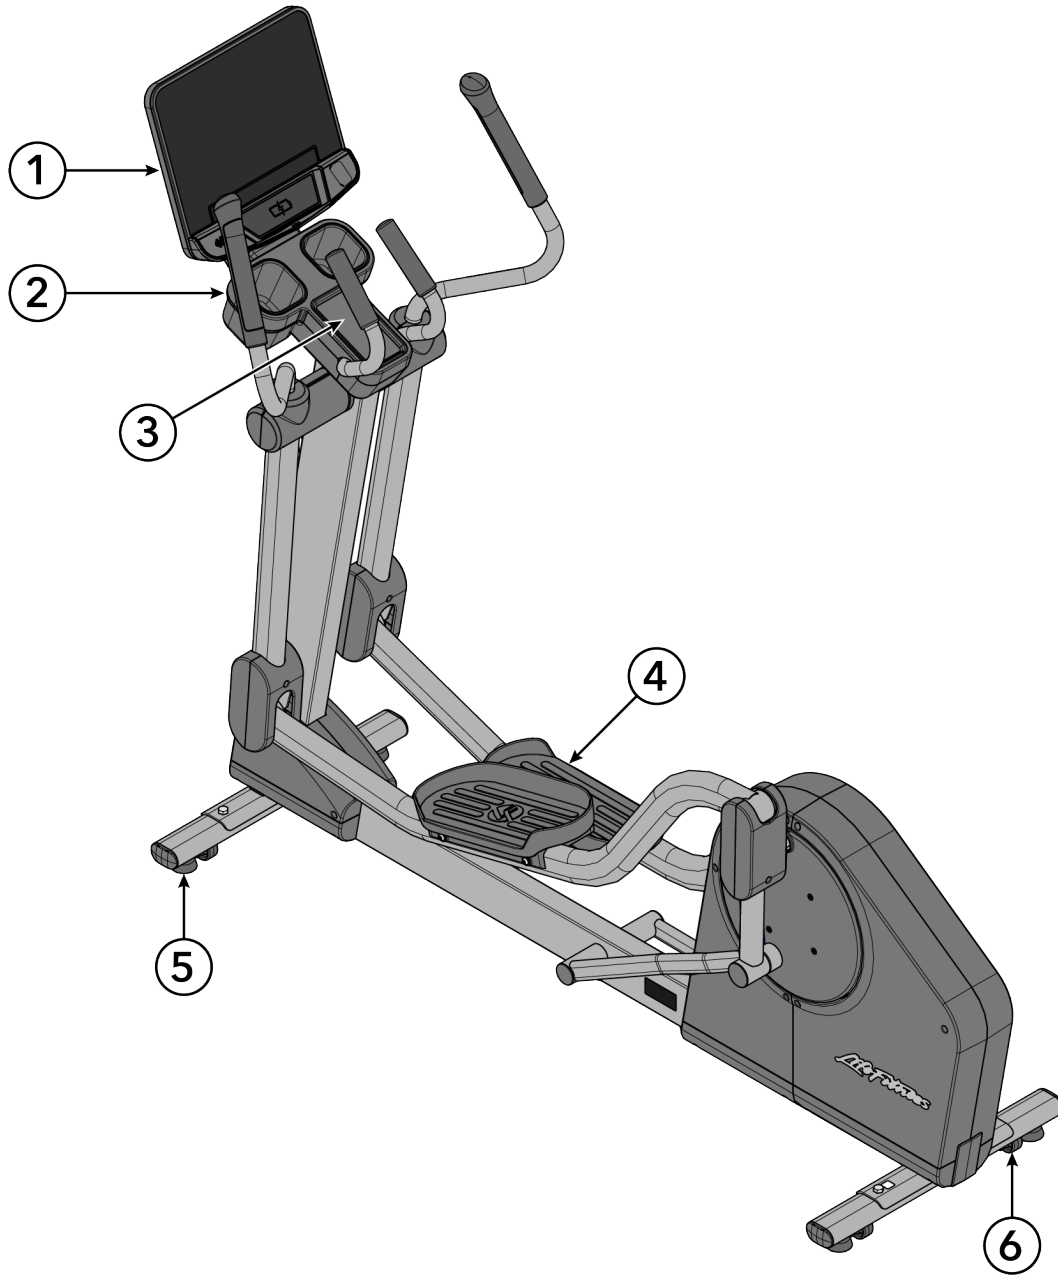


Item	Description	Qty.
1	Console	1
2	Cup Holder	2
3	Accessory Tray	1
4	Pedals	2
5	Leg Levelers	4
6	Transport Wheels	4

**NOTE:** SE4 Console shown for reference.

## Product Labels

### Compliance / Serial Number

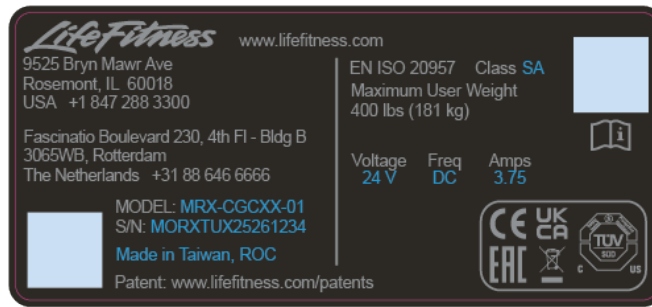

## Label Locations


**IMPORTANT:** Verify all labels / decals listed are placed on the product and in the location shown. Replace any missing or damaged labels.



Item	Description	Qty.
1	Label, Compliance, Consumer and Commercial	1

## Connections

The following connection receptacle is located at front of cross-trainer.

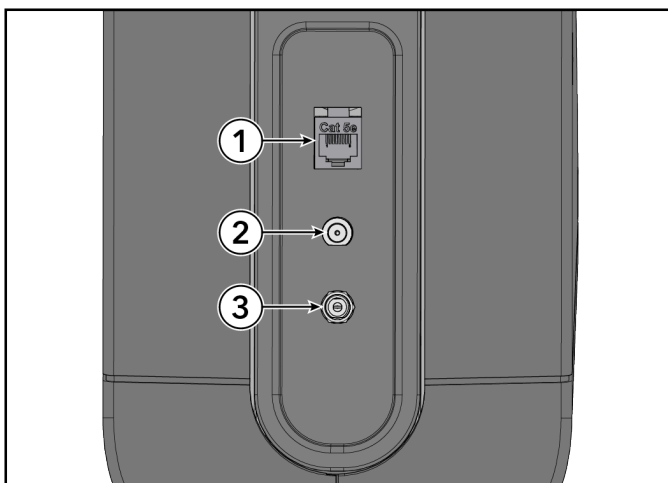

Item	Description
1	CAT5e Network / Ethernet
2	COAX
3	Power Input

## **How to use the Cross-Trainer**

Place feet anywhere on the pedals that feel comfortable. Many users put their toes 1-2" from the front edge of the pedals and 0.5-1" from the inside edge of the pedals. However, the pedals are large enough to allow a range of foot positions depending on preference. Using a combination of upper body strength with the moving handles and lower body strength at the feet, begin to rotate the pedals in a forward motion like walking. The cross-trainer can be used in a slow motion like walking or a faster motion like jogging and running. A typical usage speed is 50 - 60 revolutions of the pedals per minute. The user can concentrate more or less force on the moving handles to vary the degree of upper and lower body recruitment. The stationary bullhorn handles can also be used instead of the moving handles, to focus the effort on the lower body only. For added variation, the cross-trainer can be used in a backwards motion.

## **Mounting and Dismounting the Cross-Trainer**

Before mounting, use the moving arms to bring the pedal nearest you to its lowest position. Grasp the stationary handles and carefully step on the pedals. To dismount, rotate the pedals so the pedal you are stepping off is in the lowest position. Step off the pedals while still holding the stationary handles. Then let go of the handles.

## 4. Assembly

### Link to Additional Information Online


In addition to the content provided in this manual, please scan the QR code for further and updated information.

Life Fitness Atmos Cross-Trainer



<https://fn.fit/AtmosXinstall>

# Hardware

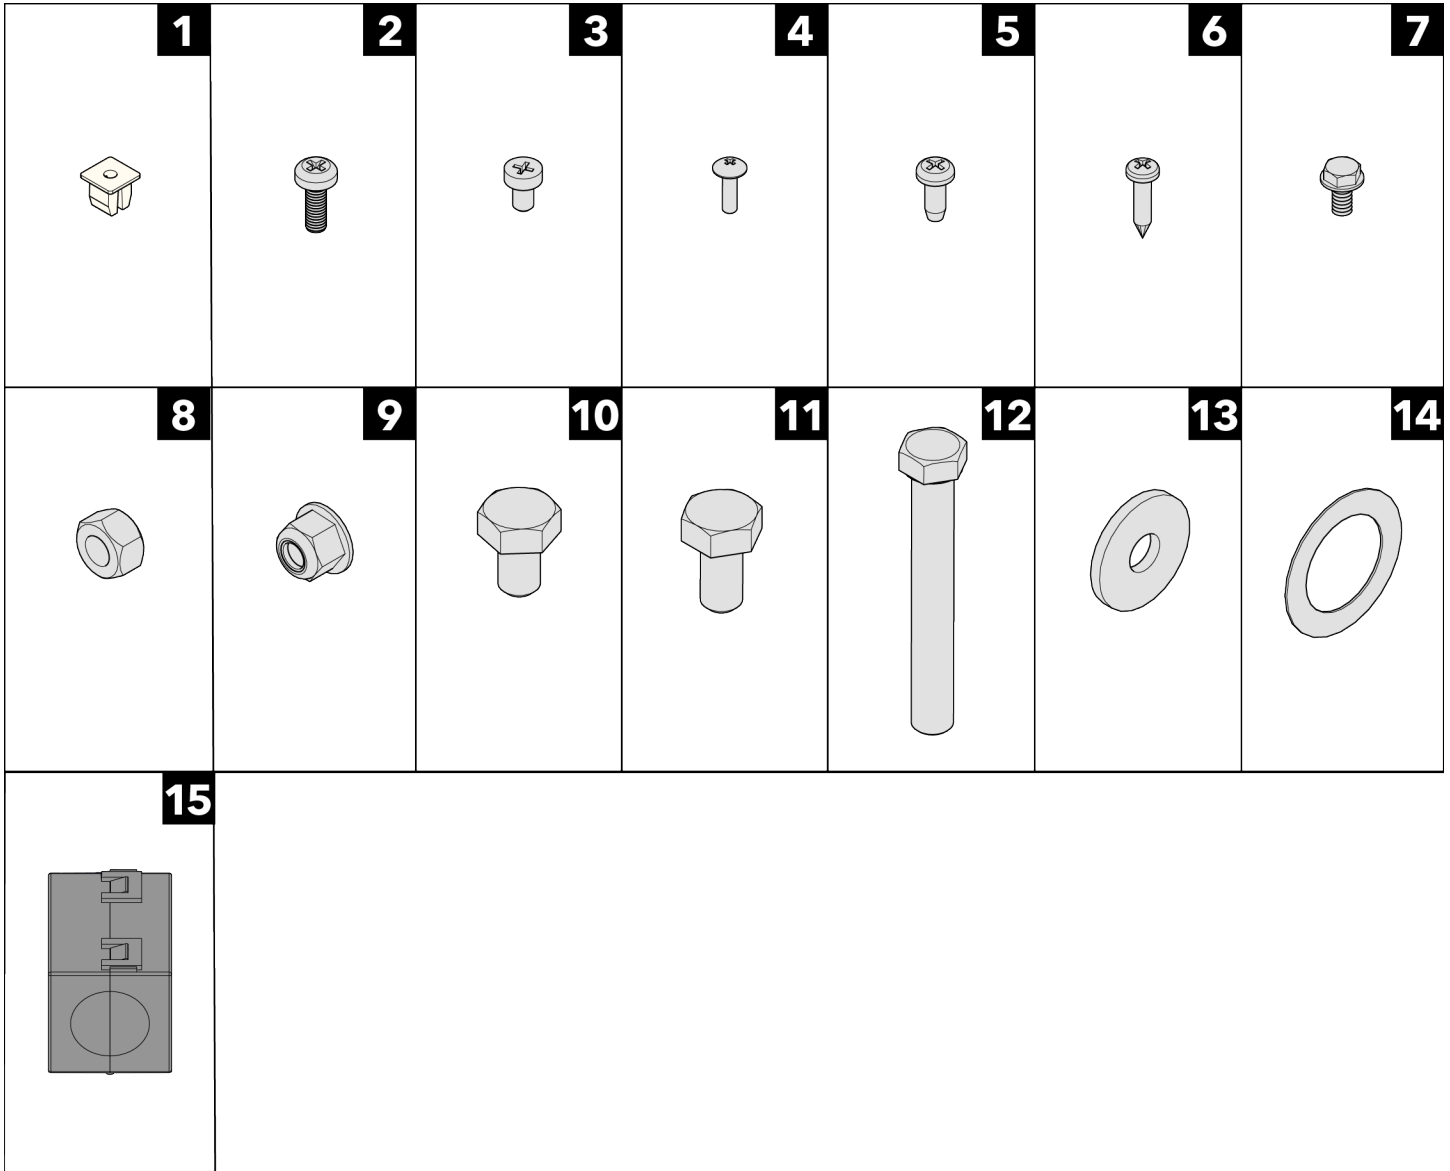

Item	Description	Qty.
1	Grommet	2
2	Screw, M5 x 0.8 x 14, PHL, PAN, MS, ST, ZN	5
3	Screw, CSL PAN M5 x 0.8-8	4
4	Screw, PHL PAN M3.5 x 18-12	4
5	Screw, PHL PAN M5 x 0.8-12	9
6	Screw, M4.2 x 0.7 6G6G x 19, DIN, PHL, PAN, AB, ST, ZB	2
7	Screw, #10 x 6 UNS, HXW, L, B, ST, GR	1
8	Nut, Hex M10 x 1.5 x 8mm	2
9	Nut, M8 x 1.25-6H, DIN, UNF, HEX, Locknut	4
10	Bolt, Hex; M10 x 1.5-16	4
11	Bolt, Hex, M10 x 1.5-20	3
12	Bolt, Hex, HD M10 x 1.5-74	3
13	Washer, 35mm OD x 10mm OD x 3mm THK	2
14	Washer, 1.0 x 1.5, Thrust, Steel	2
15	Ferrite; Suppression, Core-Case	1

## Tools Required

- 5 mm Allen wrench
- 8 mm socket wrench
- 11 mm wrench
- 13 mm wrench
- 17 mm wrench
- 17 mm socket wrench
- Phillips screwdriver
- Torque screwdriver
- Torque wrench
- Utility knife

**NOTE:** Do NOT use impact drivers to install hardware.


## Assembly Procedure

Two people are recommended for this procedure.

**TIP:** Read and understand all instructions thoroughly before assembling this unit. Check all items carefully. If there is damage, see the Customer Service section of this manual for proper procedure to return, replace, or reorder parts.


### Install Monocolumn

1. Grab monocolumn and tip upright.

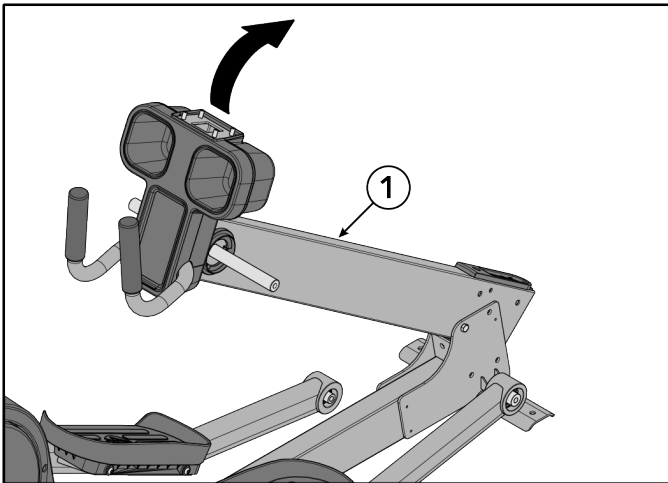

Item	Description	Qty.
1	Monocolumn	1

2. Install bolts securing side of monocolumn to base frame using a 17mm socket wrench.

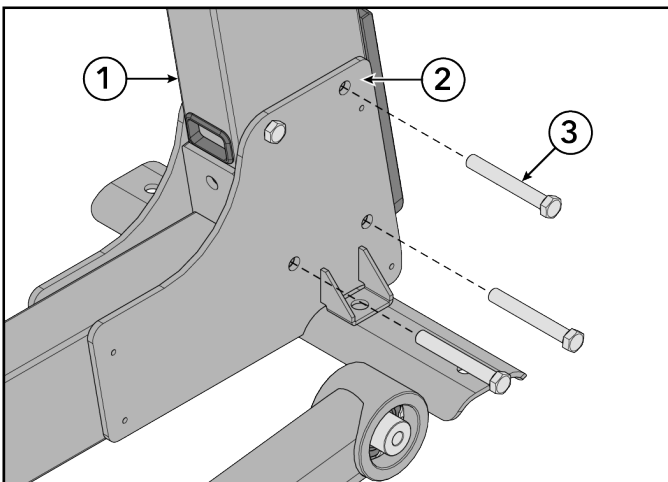


Item	Description	Qty.
1	Monocolumn	1
2	Base Frame	1
3	Bolt, Hex, HD M10 x 1.5-74	3



**Hand tighten hardware.**

3. Install bolt securing rear of monocolumn to base frame using a 17mm socket wrench.

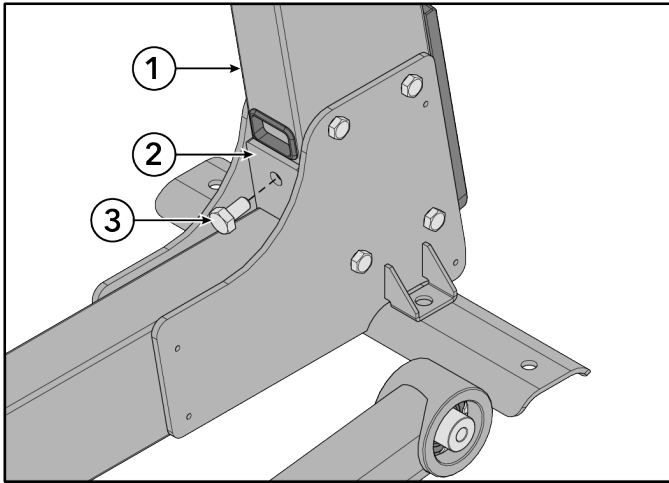

Item	Description	Qty.
1	Monocolumn	1
2	Base Frame	1
3	Bolt, Hex, M10 x 1.5-20	1



Hand tighten hardware.


4. Tighten all loose hardware to 25 ft-lb / (34 Nm) in the following order.

- a. Bolt, Hex, M10 x 1.5-20 (x1) to rear of monocolumn.
- b. Bolt, Hex, HD M10 x 1.5-74 (x3) to side of monocolumn.

5. Remove remaining packaging from unit.

### Install Stabilizers

1. Remove wooden packaging brace under rear of main frame.
2. Install bolts securing rear stabilizer to base frame using a 17mm socket wrench.

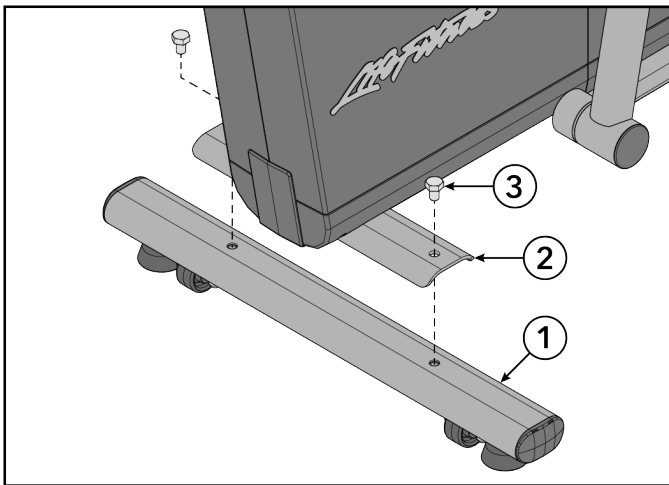


Item	Description	Qty.
1	Rear Stabilizer	1
2	Main Frame	1
3	Bolt, Hex; M10 x 1.5-16	2



Tighten hardware to 25 ft-lb / 34 Nm.

3. Remove wooden packaging brace under front of main frame.

4. Install bolts securing front stabilizer to base frame using a 17mm socket wrench.

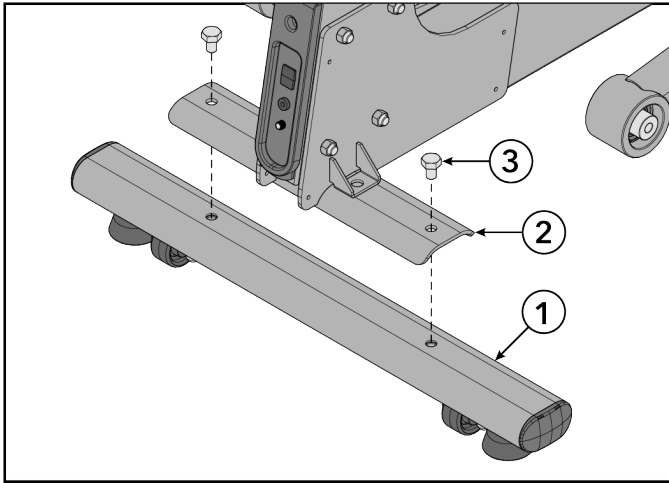


Item	Description	Qty.
1	Rear Stabilizer	1
2	Main Frame	1
3	Bolt, Hex; M10 x 1.5-16	2



Tighten hardware to 25 ft-lb / 34 Nm.

### Install Monocolumn Shrouds

Install screws securing monocolumn shrouds to base frame using a Phillips screwdriver.

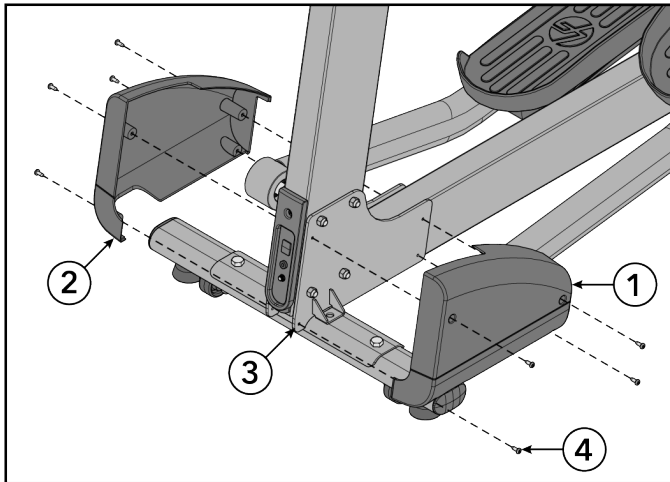


Item	Description	Qty.
1	Monocolumn Shroud, Left	1
2	Monocolumn Shroud, Right	1
3	Base Frame	1
4	Screw, PHL PAN M5 x 0.8-12	8



Tighten hardware to 13 in-lb / 1.5 Nm.

### Install Rocker Arms


1. Slide washer onto each side of pivot shaft.

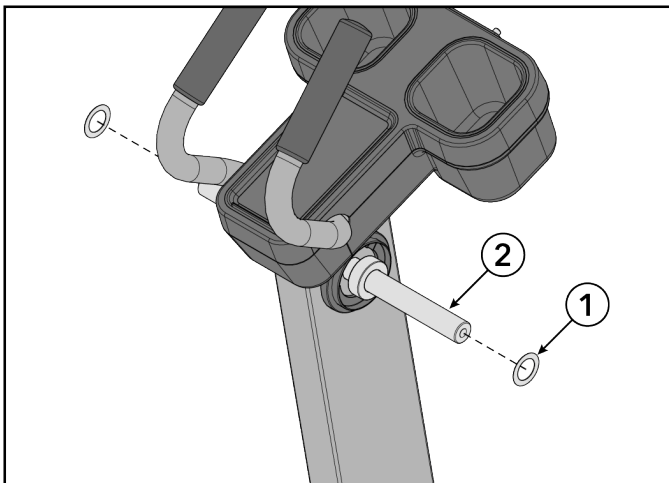

Item	Description	Qty.
1	Washer, 1.0 x 1.5, Thrust, Steel	2
2	Pivot Shaft	1

2. Slide rocker arm onto pivot shaft.

3. Install bolt and washer securing rocker arm to pivot shaft using a 17mm socket wrench.

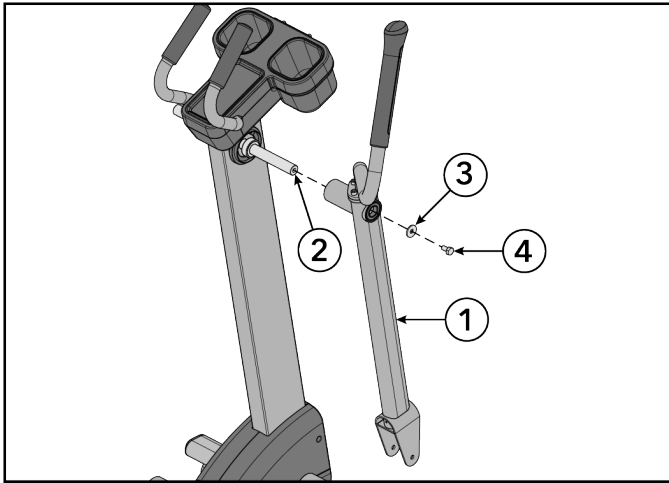

Item	Description	Qty.
1	Rocker Arm, Right	1
2	Pivot Shaft	1
3	Washer, 35mm OD x 10mm OD x 3mm	1
4	Bolt, Hex M10 x 1.5-20	1




Tighten hardware to 25 ft-lb / 34 Nm.

4. Repeat Steps 2-3 to install opposite rocker arm.

5. Check for lateral movement in the rocker arms.

- If rocker arms do not move laterally along pivot shaft, skip to next step
- If rocker arms move laterally along pivot shaft, loosen set screws using a 5mm Allen wrench. Slide shaft collars tight against rocker arms and tighten set screws.

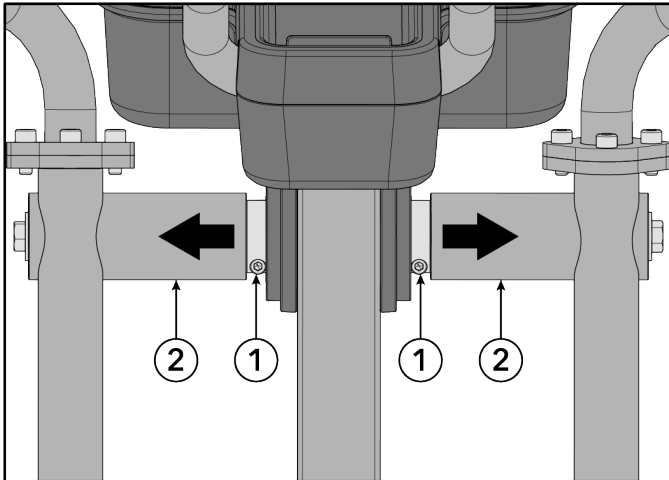


Item	Description	Qty.
1	Shaft Collar	2
2	Rocker Arm	2



Tighten hardware to 40 in-lb / 4.5 Nm.

6. Lift pedal lever and align with rocker arm.

7. Install bolt and nut securing pedal lever to rocker arm using a 17mm wrench and 17mm socket wrench.

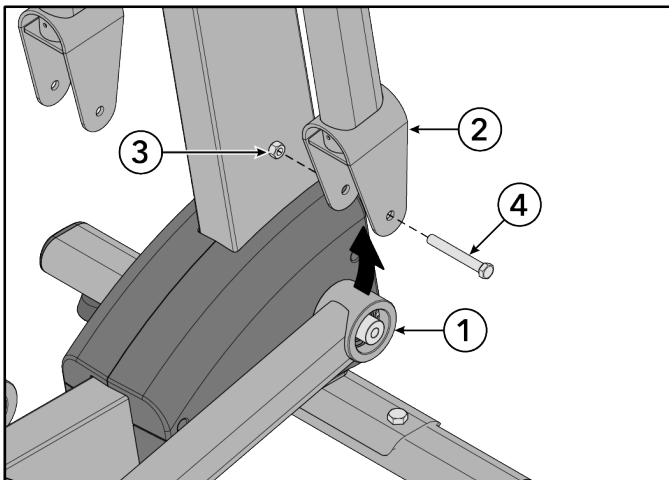


Item	Description	Qty.
1	Pedal Lever	1
2	Rocker Arm	1
3	Nut, Hex M10 x 1.5 x 8mm	1
4	Bolt, Hex HD M10 x 1.5-74	1




Tighten hardware to 25 ft-lb / 34 Nm.

8. Align clevis covers over rocker arm. Press clevis covers together.

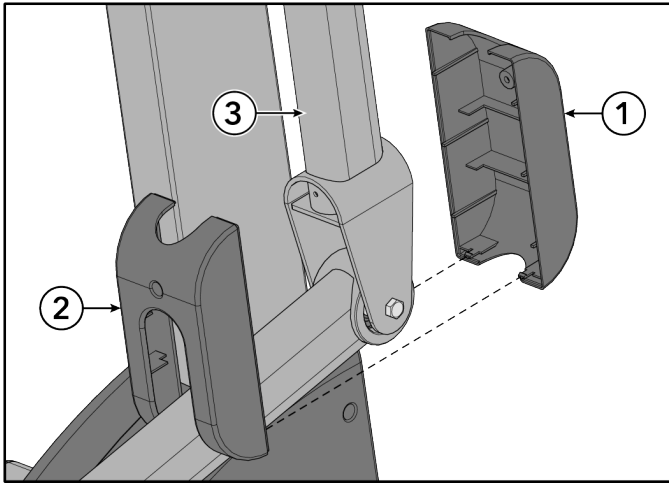

Item	Description	Qty.
1	Clevis Cover, Front	1
2	Clevis Cover, Rear	1
3	Rocker Arm	1

9. Install screws securing clevis covers to rocker arm using a Phillips screwdriver.

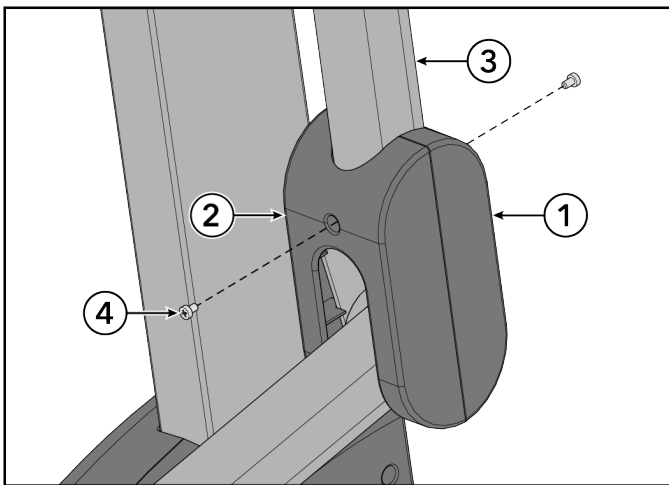


Item	Description	Qty.
1	Clevis Cover, Front	1
2	Clevis Cover, Rear	1
3	Rocker Arm	1
4	Screw, CSL PAN M5 x 0.8-8	2



**Tighten hardware to 13 in-lb / 1.5 Nm.**


10. Repeat Steps 6-9 to install opposite pedal lever and clevis covers.

11. Align rocker covers over rocker arms. Press rocker covers together.

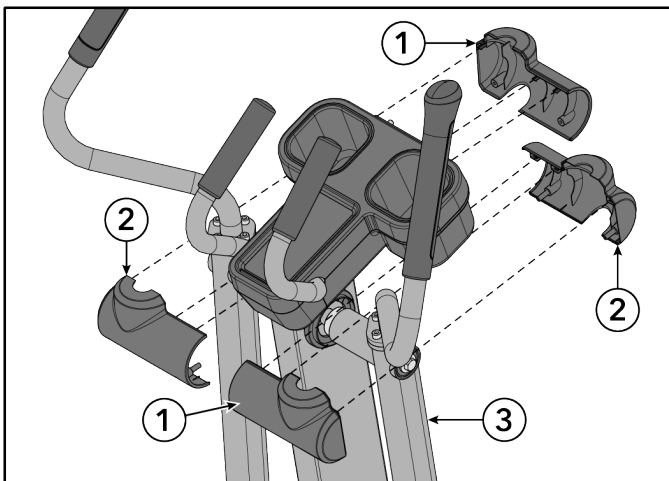

Item	Description	Qty.
1	Rocker Cover, A	2
2	Rocker Cover, B	2
3	Rocker Arm	2

12. Install screws securing rocker covers to rocker arms using a Phillips screwdriver.

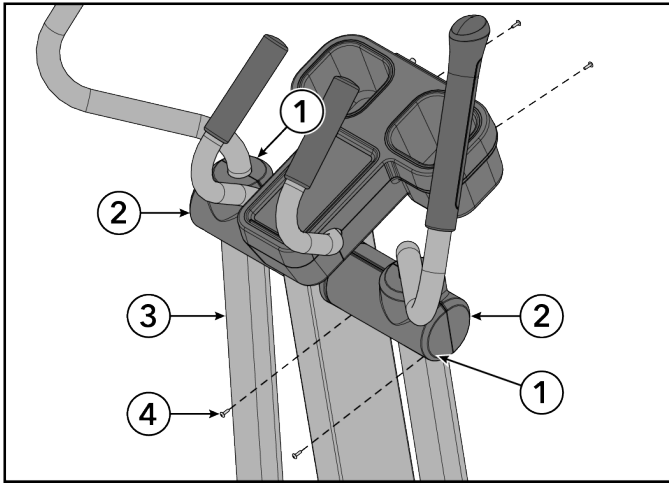

Item	Description	Qty.
1	Rocker Cover, A	2
2	Rocker Cover, B	2
3	Rocker Arm	2
4	Screw, PHL PAN M3.5 x 18-12	4




Tighten hardware to 13 in-lb / 1.5 Nm.

## Install SE4 Cables

The following procedure shows how to install cables for the SE4 Console. If SL Console is being installed, skip to [Install Console Weldment](#) topic.


1. Remove screw securing comport panel to base frame using a Phillips screwdriver.

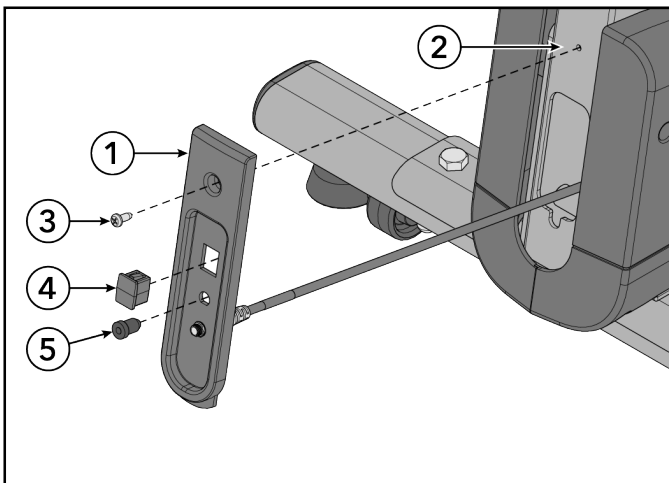

Item	Description	Qty.
1	Comport Panel	1
2	Base Frame	1
3	Screw, PHL PAN M5 x 0.8-12	1
4	Plug, RJ45 Receptacle	1
5	Plug, COAX	1

2. Remove plugs from comport panel.


3. Remove cupholders upper shroud from moncolumn and shrouds by pulling straight up.

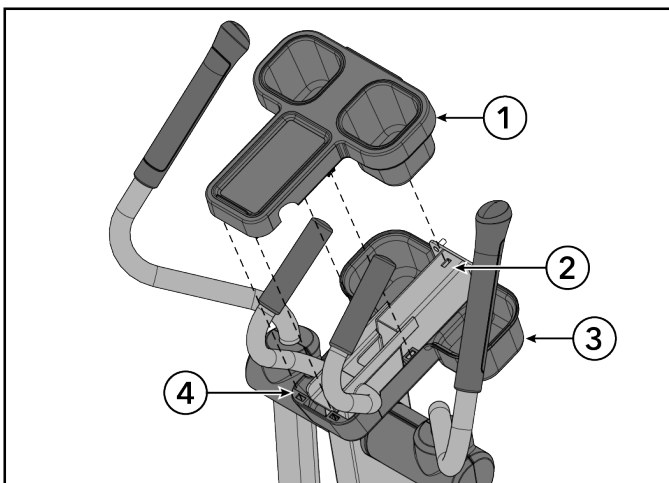

Item	Description	Qty.
1	Cupholders Upper Shroud	1
2	Monocolumn	1
3	Cupholders Lower Shroud	1
4	Bridge Front Lower Shroud	1


4. Route SE4 cables down monocolumn and out through base frame.

**TIP:** There is a pull wire pre-installed in the frame to assist with SE4 cable installation. Twist the pull wire around the ends of the SE4 cables and pull from the other end to install the cables through the frame.

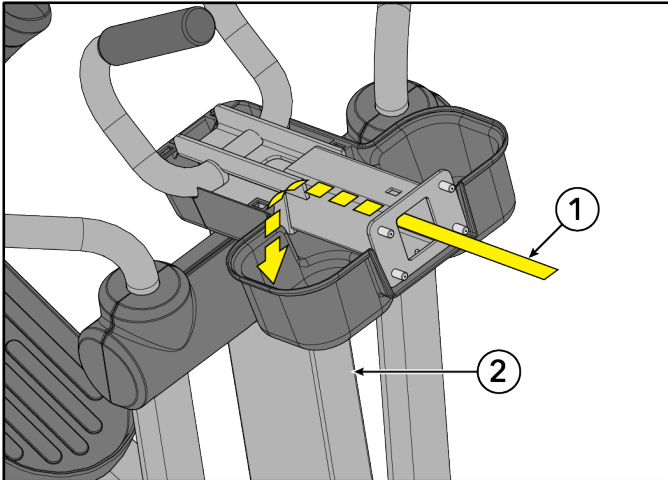


Item	Description	Qty.
1	Cables	2
2	Monocolumn	1

5. Plug cables into couplers. Insert couplers into comport panel. Install washer and nut securing coax coupler comport panel using an 11mm wrench.

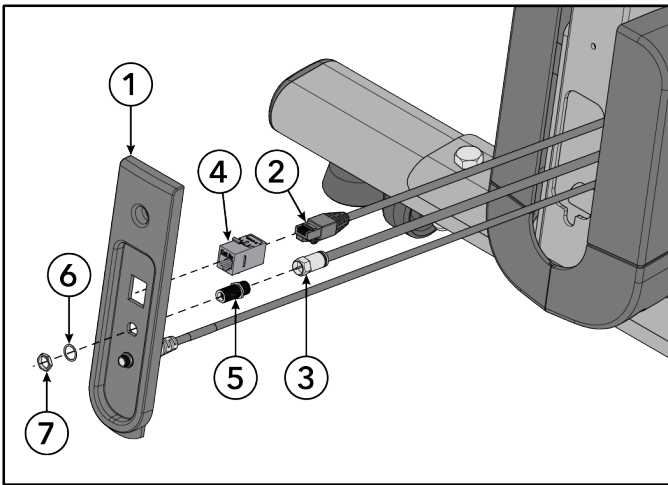

Item	Description	Qty.
1	Comport Panel	1
2	Cable, CAT5e	1
3	Cable, COAX	1
4	Coupler, CAT5e	1
5	Coupler, COAX	1
6	Washer	1
7	Nut	1

6. Install screw securing comport panel to base frame using a Phillips screwdriver.

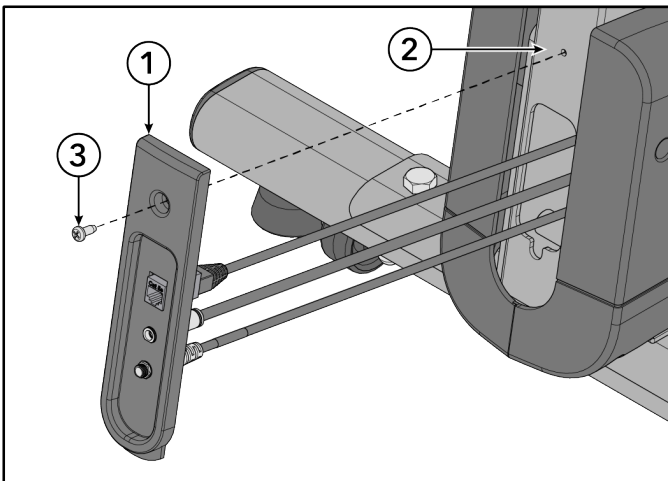


Item	Description	Qty.
1	Comport Panel	1
2	Base Frame	1
3	Screw, PHL PAN M5 x 0.8-12	1



Tighten hardware to 13 in-lb / 1.5 Nm.


## Install Console Weldment

1. Route cables up through console weldment.

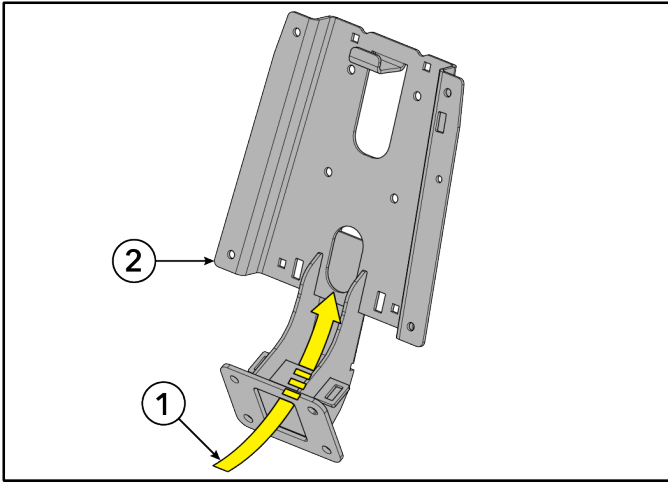


Item	Description	Qty.
1	Cables	-
2	Console Weldment	1

**NOTE:** Ground cable routes up through and out back of console weldment.

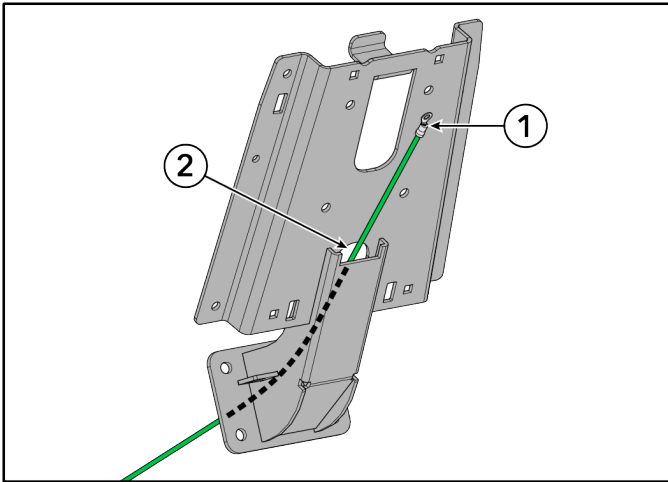

Item	Description	Qty.
1	Ground Cable	1
2	Console Weldment	1

2. Install nuts securing console weldment to monocolumn using a 13mm wrench.

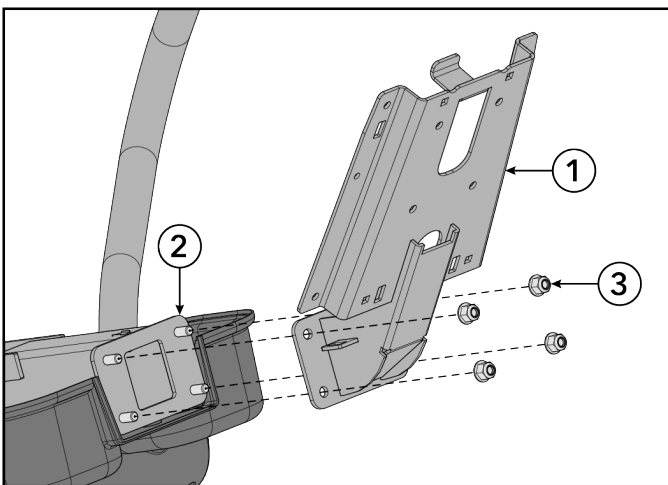


Item	Description	Qty.
1	Console Weldment	1
2	Monocolumn	1
3	Nut, M8 x 1.25-6H, DIN, UNF, HEX, Locknut	4




Tighten hardware to 25 ft-lb / 34 Nm.

3. Pull cables through console weldment until they extend approximately 6 in / 15.2 cm past top of weldment. Push remaining cable length down console weldment and monocolumn.

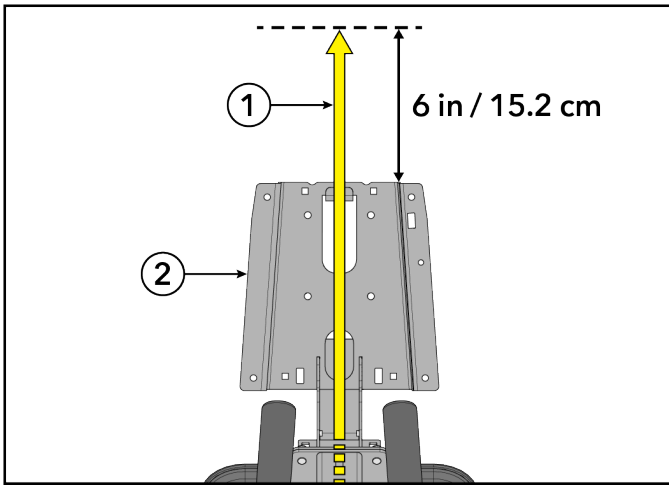


Item	Description	Qty.
1	Cables	-
2	Console Weldment	1

4. **NOTE:** The following step is only for units with SE4 Consoles. If SL Console is being installed, skip to step 5.  
Press cupholders upper shroud into monocolumn and shrouds.

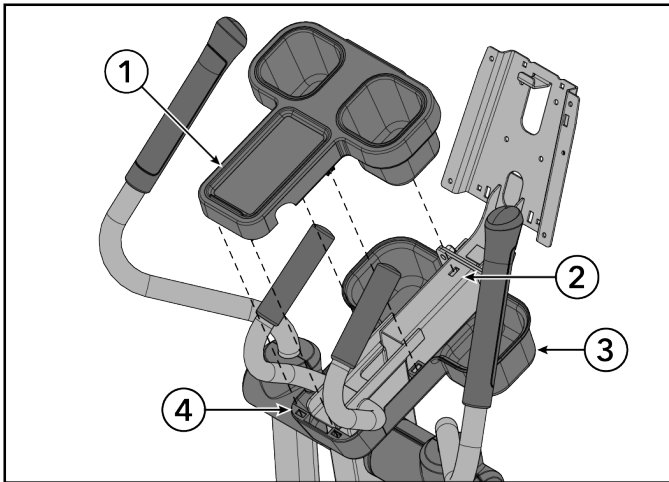


Item	Description	Qty.
1	Cupholders Upper Shroud	1
2	Monocolumn	1
3	Cupholders Lower Shroud	1
4	Bridge Front Lower Shroud	1

5. Press console front filler shroud into console weldment.

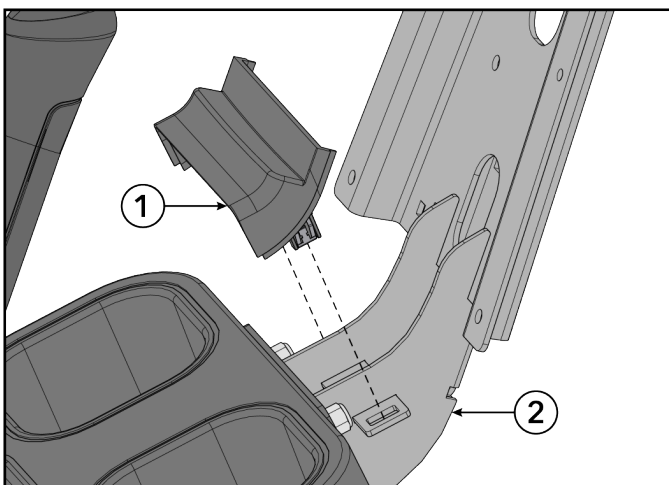

Item	Description	Qty.
1	Console Front Filler Shroud	1
2	Console Weldment	1

6. Install screw securing ground cable to console weldment using an 8mm socket wrench.

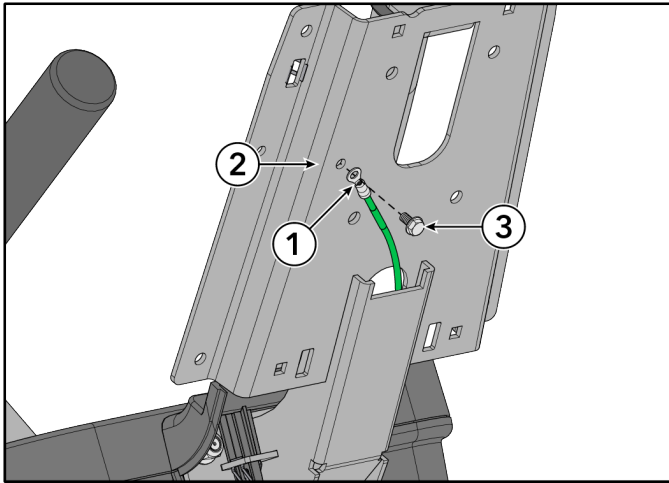

Item	Description	Qty.
1	Ground Cable	1
2	Console Weldment	1
3	Screw, #10 x 6 UNS, HXW, L, B, ST, GR	1





Tighten hardware to 2.6 ft-lb / 3.5 Nm.

## Ferrite Installation

Assemble ferrite to base power and base signal cable at the bottom of the console weldment.

### Ferrite

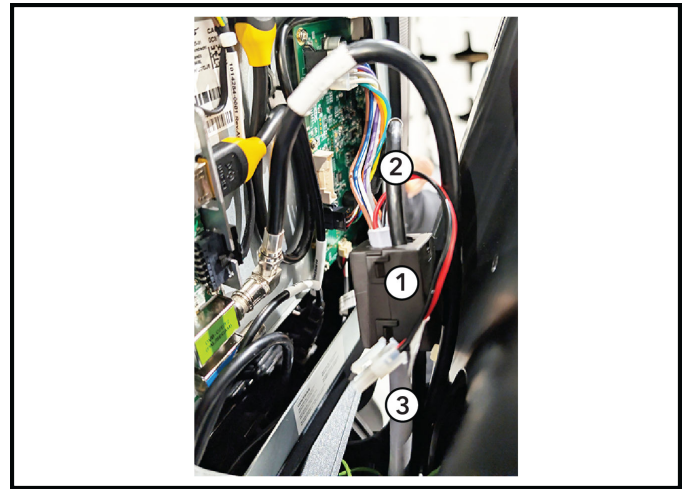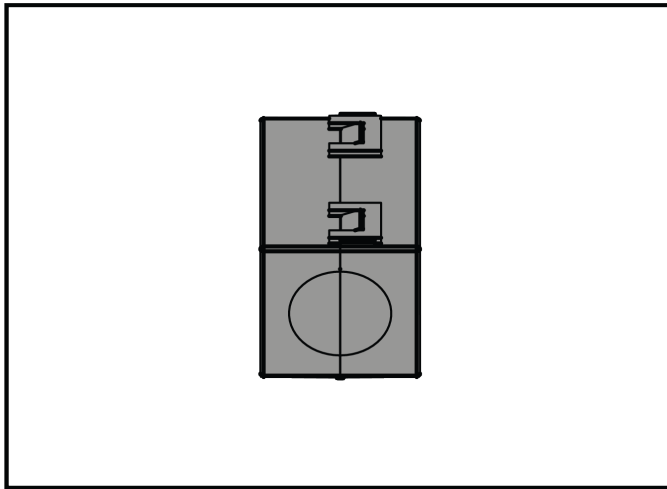


Item	Description	Qty.
1	Ferrite: Suppression, Core-Case	1
2	Cable, Console to Base, Signal	1
3	Cable, Console to Base, Power	1

## Base to Console Connections


Connect base cables to console.

### SL

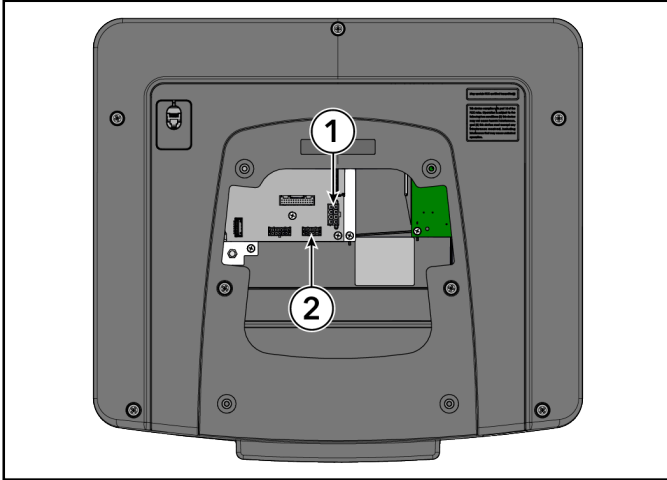

Item	Description
1	Base Power
2	Base Comm

### SE4

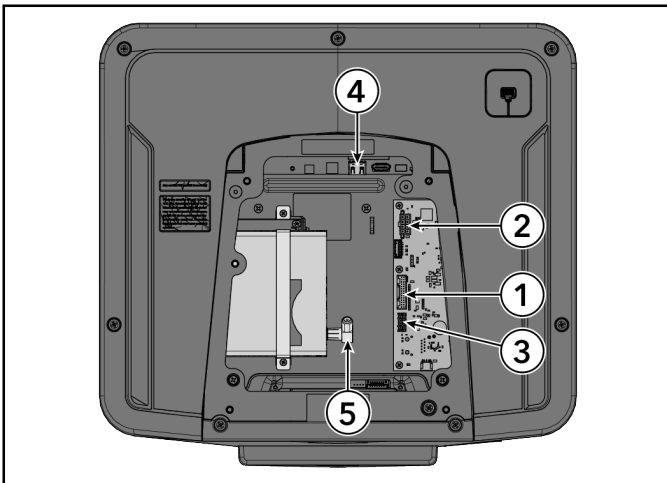


Item	Description
1	Base Interface Cable
2	Base Power
3	Base Comm
4	Ethernet
5	COAX

## Install Console: SL or SE4

Install screws securing console to console support weldment using a Phillips screwdriver.

**NOTE:** Use the hook on top of the console support weldment to aid in console installation.

### SL Console


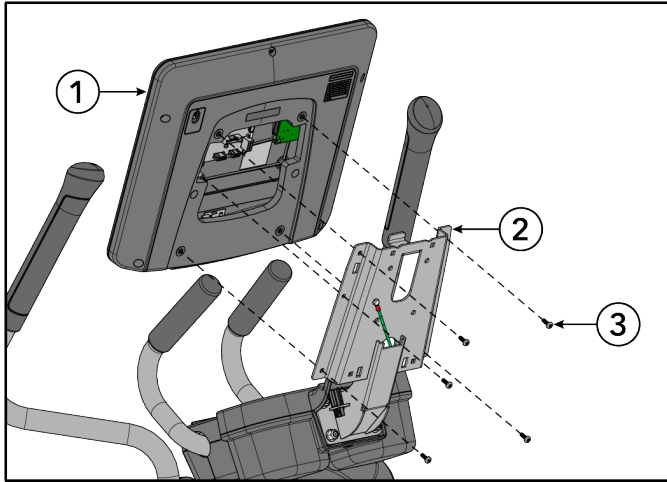


Item	Description	Qty.
1	SL Console	1
2	Console Support Weldment	1
3	Screw, M5 x 0.8 x 14, PHL, PAN, MS, ST, ZN	5



Tighten hardware to 16.8 in-lb / 1.9 Nm.

### SE4 Console

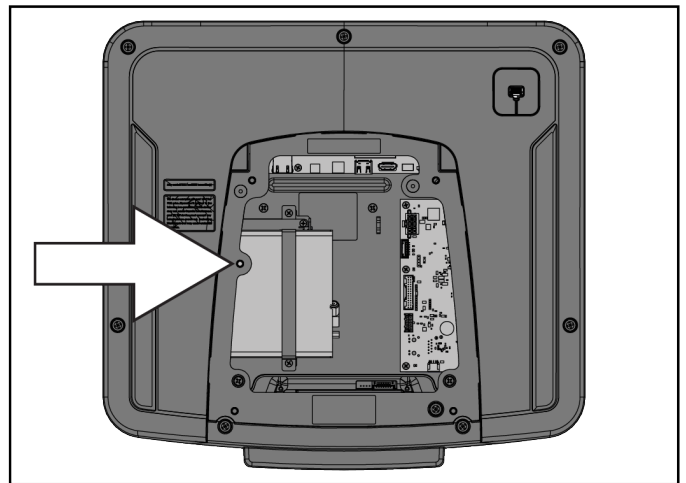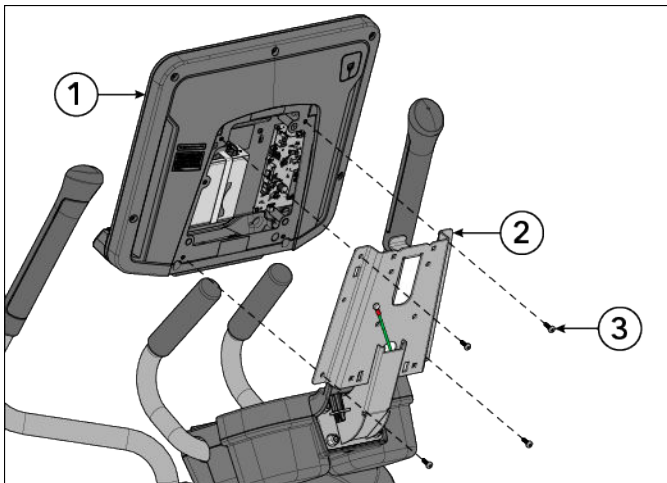

**NOTE:** Do not install the screw in the location shown (next to arrow) if the SE4 console has a Set Top Box Sync (STB) receiver! The screw will hit the STB receiver inside of the console.


Item	Description	Qty.
1	SE4 Console	1
2	Console Support Weldment	1
3	Screw, M5 x 0.8 x 14, PHL, PAN, MS, ST, ZN	4



Tighten hardware to 16.8 in-lb / 1.9 Nm.

## Install Console Back Shroud

1. Insert grommets into two holes in back of console weldment.
2. Push clips on top of console back shroud into corresponding slots on console weldment.
3. Install screws securing console back shroud to console weldment using a Phillips screwdriver.

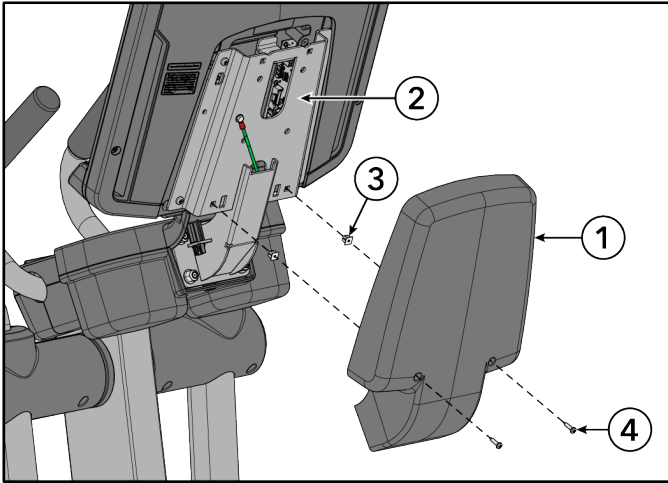

Item	Description	Qty.
1	Console Back Shroud	1
2	Console Weldment	1
3	Grommet	2
4	Screw, M4.2 x 0.7 6G6G x 19, DIN, PHL, PAN, AB, ST, ZB	2





Tighten hardware to 13 in-lb / 1.5 Nm.

## Place Unit in Position

See [Where to Place and How to Stabilize the Cross-Trainer](#) for further information.

1. Place unit in position.
2. Lower leg levelers until transport wheels no longer make contact with the ground using a 17mm wrench.

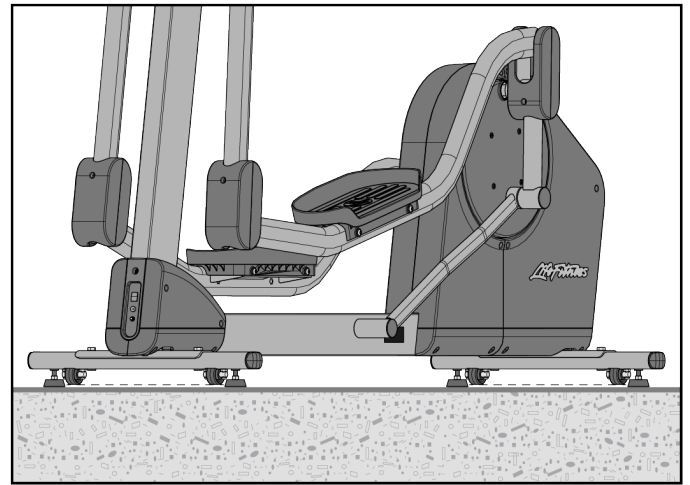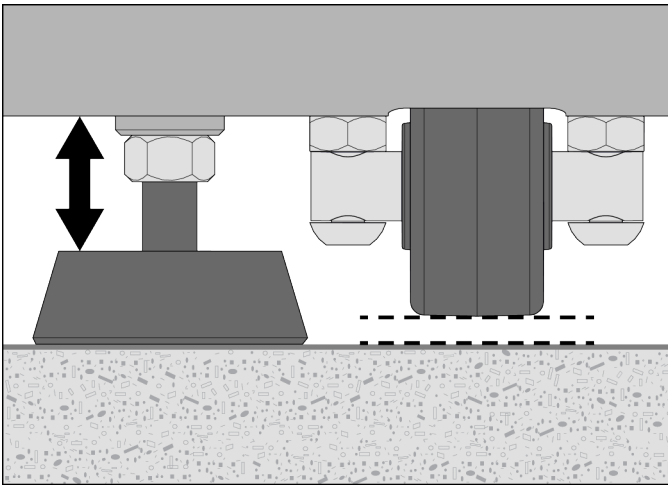

## Test Unit For Proper Operation

# 5. Specifications

## Product Specifications

Designed Use	Heavy / Commercial EN ISO 20957 Class S
	Home EN ISO 20957 Class H
Maximum User Weight	400 lbs. / 181 kg
Drive Type	Generator
Resistance Levels	26
Power Requirements	See <a href="#">Electrical Power Requirements</a> Section
Wireless Charging <b>(SE4 Console Only)</b>	<p>Qi wireless induction charging</p> <ul style="list-style-type: none"> <li>• Charging area: 50mm x 80mm (approximately 2 in. x 3 in.)</li> <li>• Charging response time: less than 3 seconds</li> <li>• Maximum output: 10W</li> <li>• Charging protocol compatibility: Qi Fast Charging</li> </ul>
Wireless Communication	BT, NFC, Apple & Samsung watch compatibility, ANT+, RFID, Wireless Connectivity

	<b>Physical Dimensions (without console)</b>
Length	81.9 in. / 208 cm
Width	30.7 in. / 78 cm
Height	65.2 in. / 165.6 cm
Weight	262.3 lbs. / 119 kg

# 6. Service and Technical Data

## Preventive Maintenance Tips

**NOTE:** Safety of the equipment can be maintained only if the equipment is examined regularly for damage or wear. Keep the equipment out of use until defective parts are repaired or replaced. Pay special attention to parts that are subject to wear, as outlined below.

**REMARQUE :** Pour assurer la sécurité du matériel, il convient de l'inspecter régulièrement afin de déceler tout signe d'usure ou d'endommagement. N'utilisez pas l'appareil avant d'avoir réparé ou remplacé les pièces défectueuses. Portez une attention toute particulière aux pièces qui s'usent, comme indiqué ci-dessous.

The following preventive maintenance tips will keep the product operating at peak performance:

- Locate the product in a cool, dry place.
- Clean the display console and all exterior surfaces with an approved or compatible cleaner (see Approved and Compatible Cleaners) and a microfiber cloth.
- Long fingernails may damage or scratch the surface of the console; use the pad of the finger to press the selection buttons on the console.
- Clean the top surface of the pedals regularly.
- Clean the housing and moving arms thoroughly on a regular basis.

**NOTE:** When cleaning the exterior of the unit, a non-abrasive cleaner and soft cotton cloth are strongly recommended. At no time should cleaner be applied directly to any part of the equipment.

## Approved and Compatible Cleaners

Two preferred cleaners have been approved by reliability experts: PureGreen 24 and Gym Wipes. Both cleaners will safely and effectively remove dirt, grime and sweat from equipment. PureGreen 24 and the Antibacterial Force formula of Gym Wipes are both disinfectants that are effective against MRSA and H1N1.

PureGreen 24 is available in a spray which is convenient for gym staff to use. Apply the spray to a microfiber cloth and wipe down the equipment. Use PureGreen 24 on the equipment for at least 2 minutes for general disinfection purposes and at least 10 minutes for fungus and viral control.

Gym Wipes are large, durable pre-moistened wipes to use on the equipment before and after workouts. Use Gym Wipes on the equipment for at least 2 minutes for general disinfection purposes.

Contact Customer Support Services to order these cleaners (1-800-351-3737 or email: [customersupport@lifefitness.com](mailto:customersupport@lifefitness.com)).

Mild soap and water or a mild non-abrasive household cleaner can also be used to clean the display and all exterior surfaces. Use a soft microfiber cloth only. Apply the cleaner to the microfiber cloth before cleaning. DO NOT use ammonia or acid based cleaners. DO NOT use abrasive cleaners. DO NOT use paper towels. DO NOT apply cleaners directly to the equipment surfaces.

## Preventive Maintenance Schedule

Item	Weekly	Monthly	Biannually
Console Overlays	Clean		Inspect
Bottle Holders / Accessory Trays	Clean	Inspect	
Console Mounting Screws			Inspect
Hardware			Inspect
Frame	Clean		Inspect
Plastic Covers	Clean	Inspect	
Leg Levelers		Inspect / Adjust	
Pedals	Clean	Inspect	

## Troubleshooting the Polar® Heart Rate Chest Strap

### Heart rate reading is erratic or absent entirely

Probable Cause	Corrective Action
Belt transmitter electrodes are not wet enough to pick up accurate heart rate readings.	Wet the belt transmitter electrodes.
Belt transmitter electrodes are not laying flat against the skin.	Ensure the belt transmitter electrodes are laying flat against the skin.
Belt transmitter needs cleaning.	Wash the belt transmitter with mild soap and water.
Belt transmitter not properly set up.	Setup of the belt transmitter is accomplished by initially bringing it with in 1 foot / 30.5 cm of the receiver. The receiver is in the console. After the heart rate is displayed on the console the range is extended to 3 feet / 91.4 cm.
Chest strap battery is depleted.	Contact Customer Support Services for instructions on how to have the chest strap replaced.

### Abnormally elevated heart rate readings

Probable Cause	Corrective Action
Electromagnetic interference from: <ul style="list-style-type: none"> <li>• Television sets and / or antennas</li> <li>• Cell phones</li> <li>• Computers</li> <li>• Cars</li> <li>• High voltage power lines</li> <li>• Motor driven exercise equipment</li> </ul>	Move the exercise equipment a few inches away from the probable cause, or move the probable cause a few inches away from the exercise equipment, until the heart rate readings are accurate.

## Recycle the Battery - SL Console

Remove and recycle the rechargeable battery before discarding this product at the end of its useful life. Disconnect the power supply (*if applicable*) before removing the battery. To access the battery remove the screws that hold the upper rear cover to the back of the cross-trainer. The battery is located near the top of the frame, directly below the rear shrouds that are to be removed. To remove the battery, remove the two wires connected to the battery and the two screws that hold the battery in place. Dispose of the battery properly.

## How To's

### Knowledge Base

See <https://lfn.fit/KnowledgeBase> for more detailed information.

## How to Obtain Product Service

1. Verify the symptom and review the operating instructions. The problem may be unfamiliarity with the product and its features and workouts.
2. Locate and write down the serial number of the unit which is located on the top right of the front stabilizer.
3. Contact Life Fitness Customer Support Services at <http://www.lifefitness.com>.

## Software Updates

The Equipment contains embedded software essential to its proper operation and safety. To maintain functionality, security, and warranty coverage, the Equipment software must be kept current with all manufacturer-issued updates, patches, and upgrades ("Updates").

1. Notification and Monitoring - Owner / Operator shall (a) register and maintain a valid email address with Manufacturer for the purpose of receiving Update notifications, or (b) regularly monitor Manufacturer's designated website for posted Update notices. Failure to do either shall not relieve Owner / Operator of the obligation to install Updates.
2. Update Method - Updates will be made available through the Manufacturer's secure electronic distribution channel. Owner / Operator shall follow the instructions provided for proper installation and implementation.
3. Responsibility for Compliance - The duty to remain informed of Updates rests solely with the Owner / Operator. Manufacturer's obligation to provide notification is satisfied by sending notice to the registered email address or by posting notice on its designated Update website.
4. Consequences of Non-Compliance - Failure to install Updates may result in:
  - Voided or limited warranty coverage;
  - Suspension of technical support;
  - Diminished equipment performance or safety hazards; and
  - Manufacturer disclaiming liability for resulting injury, damage, or loss.

# 7. Warranty

## Warranty Information

Please use the link below or scan QR code to access warranty information:

<http://lifelitness.com/warranties>



# 8. Release Notes

## Updates to Manual


February 1, 2026 (Rev AB)

Topic	Changes
Link to Additional Information Online	Added
Front Cover	Added: Owner's Manual
Safety Instructions	Added: Owner of the equipment is responsible for providing the users of the equipment with all warnings and instructions.
	Updated verbiage: Free standing equipment shall be positioned on a flat, stable and horizontal base.
Electrical Requirements	Updated table to include Consumer
Product Overview	Added: Product Labels
Hardware	Added: Ferrite
Ferrite Installation	New assembly step
Install SE4 Cables	Updated verbiage on the TIP for pull wire cable.
Attach Console	Image and topic for SE4 console updated to 4 screws.
Service and Technical Data	Added: Software Update topic
Specifications	Deleted: Pedal Speed Range









1028281-0001