

CHANNEL SEARCH

RACP-20794, RACP-21072 & RACP-21073

DIGITAL

Auto tune channels.

- Press the MENU key and then press the DOWN ARROW key to SETUP.
- At the SETUP screen press the ENTER key.
- Press the ENTER key until the TUNING BAND is set to CABLE AUTO.
- Press the DOWN ARROW key to scroll down to AUTO CH SEARCH and press the ENTER key.
- Wait for the tuner to find all available channels. **NOTE:** This may take several minutes.
- The monitor is now tuned to all available channels.
- Refer to owners manual for complete setup information.

RACP-20794

Setup Menu

In the setup menu you adjust the TV settings for first time use.




Tuning Band	Select Tuning Band. Choices are Air, Cable STD, Cable HRC, Cable IRC or Cable Auto.
DTV Signal	Displays signal strength.
Auto Ch Search	Auto search the NTSC and ATSC TV signals.
Add On Ch Search	Add channels after completing the Auto Ch Search.
Manual Ch Set	Select viewable or non viewable after completing the Auto Ch Search.
Channel Labels	Edit the names of labels.
Menu Language	Change the OSD (On Screen Display) menu languages. Choices are English, Spanish or French.
Reset	Reset monitor to default settings.

RACP-21072

Setup Menu

In the setup menu, adjust the TV settings for first time use.

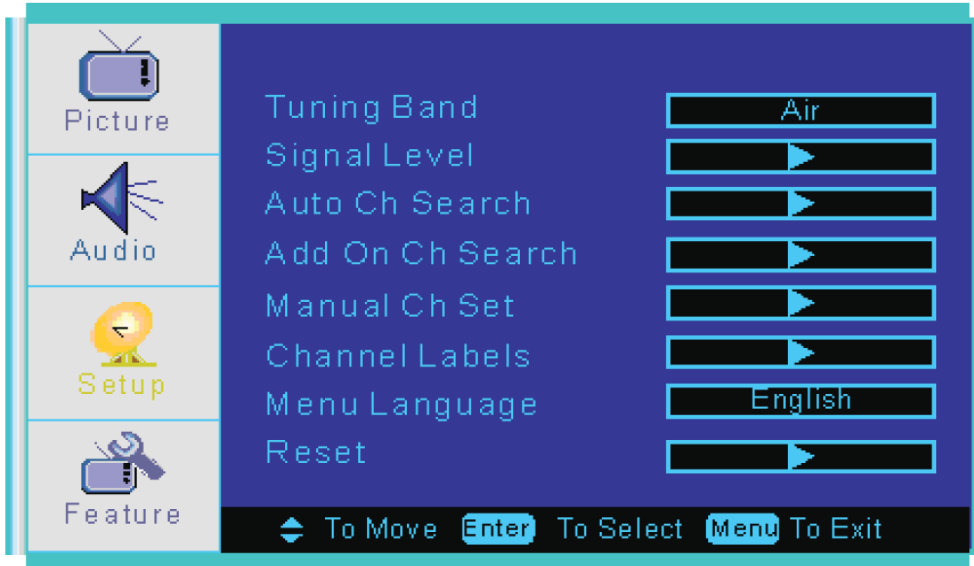

Tuning Band Select Tuning Band. Choices are Air, Cable STD, Cable HRC, Cable IRC or Cable Auto.

Auto Ch Search Auto search the NTSC and ATSC TV signals.

Add On Ch Search Add channels after completing the Auto Ch Search.



Manual Ch Set Select viewable or non viewable (to hide) after completing the Auto Ch Search.

Channel Labels Edit the name labels for each channel.



Menu Language Change the OSD (On Screen Display) menu languages. Choices are English, Spanish or French.

Reset Reset monitor to default settings.

RACP-21073


Setup Menu

The setup menu is used to configure the PEM for first time use.




Country Set the country.

Auto tuning This option allows user to auto tune to the received TV channels.

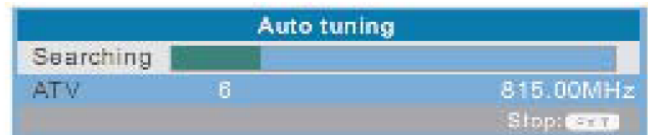

Manual tuning This option can be used to manually tune the received TV channels.

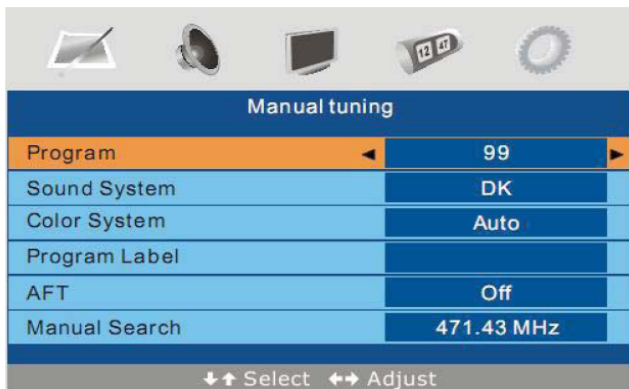

Analog Manual Search Menu

Program The current program/channel number.
Sound System Set the sound system. Choices are I, DK, L/L' or BG.
Colour System Set the colour system. Choices are Auto, PAL or SECAM.
Program Label This option allows user to label an analog program.
AFT Turn automatic fine tuning on or off.
Manual Search This option allows user to preset channels one by one.

Digital Manual Search Menu

Channel The current program/channel number.
Start Search Choose this to start the DTV search. Also shows the status of the search.
Service Found Shows the services found.
Signal Quality Shows the current channel signal quality.
Signal Strength Shows the current channel signal strength.
Frequency Shows the current channel frequency.