


## CYBEX PEM – Setup for Closed Caption

The following is a procedure to set up the closed caption option on a PEM (Model: CP-21072).

Using the Remote Control, press the menu key to access the main set up menu, then scroll down the setup menus to the “Features”, and Closed Captions tab (see below):

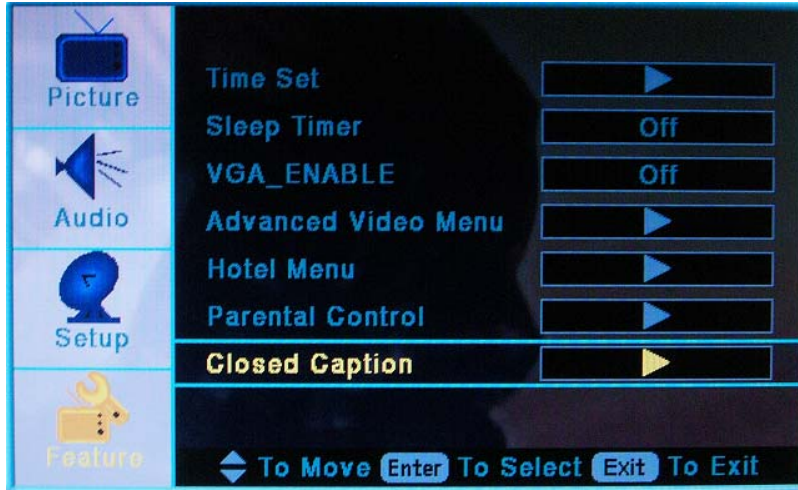


Once selected:




With “CG On” highlighted, press “Enter” to save. The closed caption only appears when the volume level is at “0”. The factory setting defaults the volume at level “5”. To have the captions appear every time the PEM powers up, return to the “feature” menu and select “Hotel menu”.

When in the Hotel Menu, you will need a password to enter the menu. The default password is 0-0-0-0. Once the menu is displayed, the option to select is "Boot set":

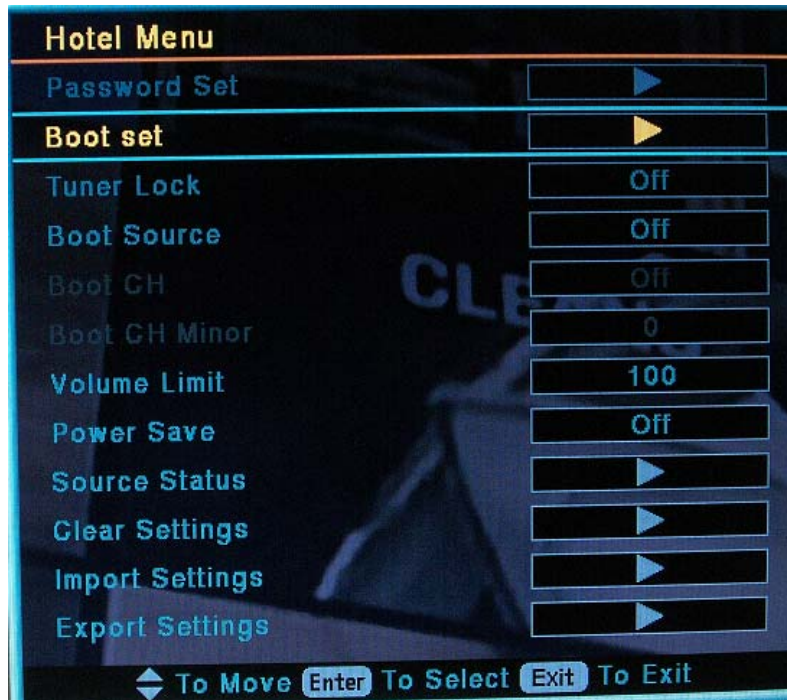

In this menu it allows you to alter how the TV comes up every time the equipment is powered on. Here you can change the volume to default to "0".

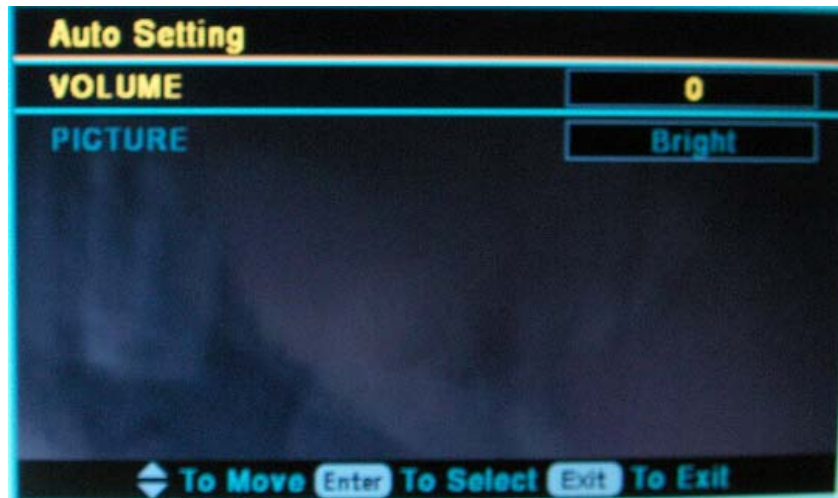

This will allow the captions to appear at startup. When the user increases the volume above "0", the captions will no longer display.