

# Power Requirements for Cybex® Products

Information Sheet

Read and understand all instructions on this sheet and in the Owner's manual before plugging any Cybex power cord into an electrical outlet. This information sheet will help you identify the voltage and cords you need where the product is installed, and will outline the requirements for:

- Grounded, dedicated lines
- Voltage
- Power cords
- Power supplies
- Extension cords

Observe the following warnings:



**WARNING: Shock and electrocution hazard**

- *Unplug unit and let sit 10 minutes before cleaning or performing maintenance*
- *Electrical charge can remain in unit after unplugging*
- *Keep water and liquids away from electrical parts*



**WARNING: For maintenance, service and repair:**

- *Must be performed by trained service personnel only*
- *Use only Cybex replacement parts*
- *Unplug unit before working on it*
- *Keep water and liquids away from electrical parts.*



**WARNING: Shock and electrocution hazard.**

- *Route power cord so it does not become damaged.*
- *Do not allow cord to be pinched or interfere with movement of treadmill.*


## Grounded, Dedicated Line

Cybex equipment must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. Cybex power cords have an equipment-grounding conductor and a grounding plug. Do not use a ground plug adapter to adapt the power cord to a non-grounded outlet. Do not use a GFCI outlet or circuit breaker. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances where the product is installed.

Each Cybex treadmill shall be connected to a dedicated circuit, or individual branch circuit, with its own LINE, NEUTRAL, and GROUND conductors. Treadmills connected to circuits that share neutrals (multi-wire branch circuits) are more likely to experience intermittent errors due to voltage fluctuations on the neutral conductor.


## Voltage

The required voltage for your unit is located on the serial number decal (usually on the front of the unit). Line voltage requirements differ based on the country where the equipment is used. For example, in the United States Cybex treadmills require a circuit rated at 115 VAC, 60 Hz and 20 amps. If you are installing a 115 VAC Cybex treadmill in a location with 15 amp outlets, contact an electrician to install a 20 amp dedicated line prior to use. Do not bend, modify or adapt a power cord to fit.

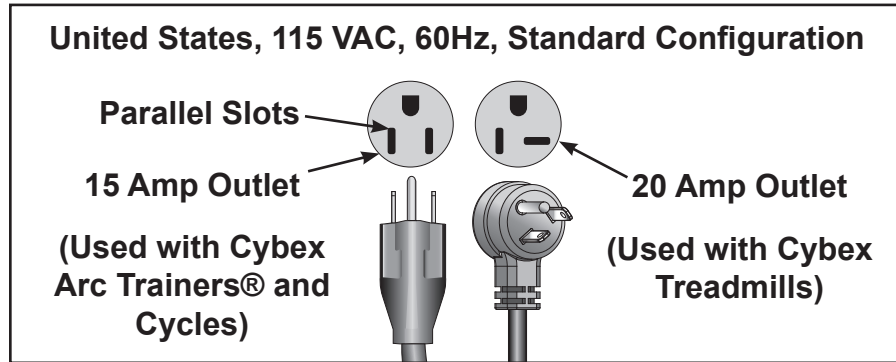

## Power Cords

Power cords sold by Cybex include those listed in the table on the following page.

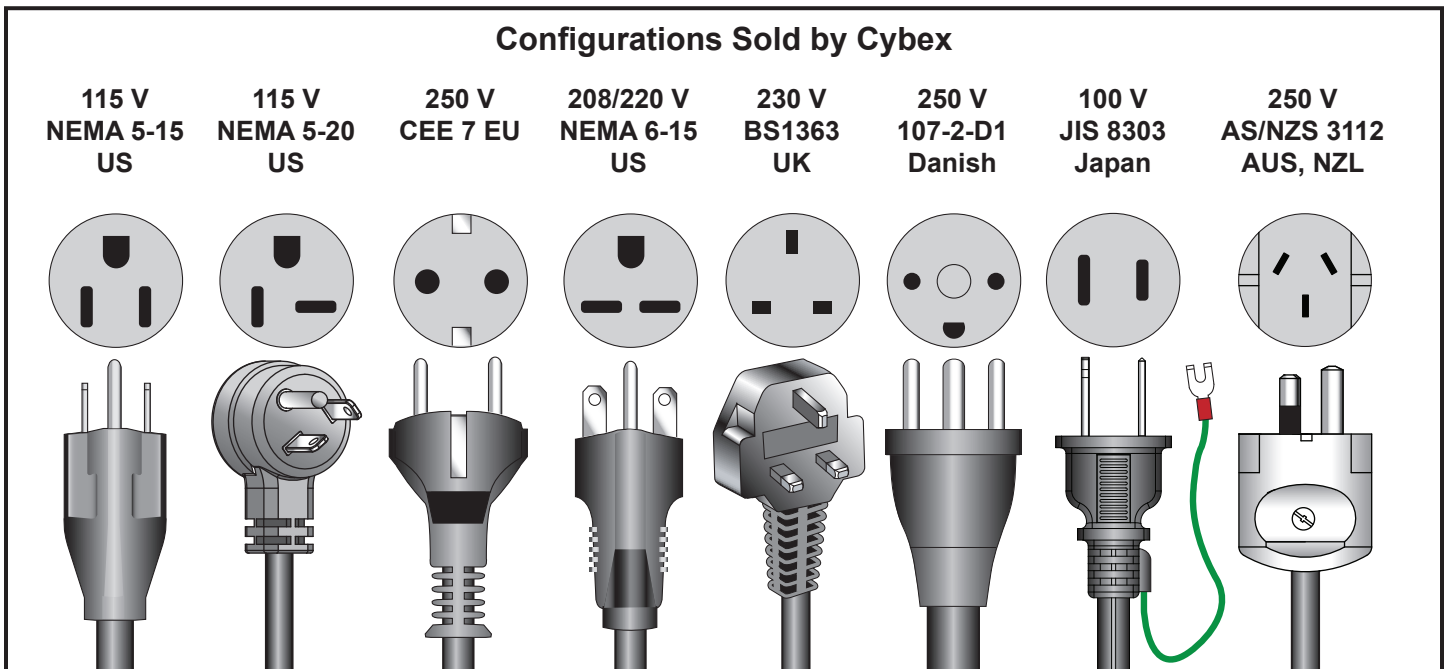

See table below to find power cord part numbers for current Cybex products.

### Arc Trainers

Model	Part Number	Power Cord Description	Configuration
525AT	AW-24071	115 VAC, 60 Hz, 10 A	NEMA 5-15 US
	AW-24072	230 VAC, 50 Hz, 10 A	CEE 7 EU
	AW-24073	250 VAC, 10 A	BS1363 UK
	AW-24074	100 VAC, 50/60 Hz, 3 A	JIS 8303, Japan
	AW-24075	250 VAC, 10 A	107-2-D1 Danish
	AW-24076	250 VAC, 10 A, Australia, New Zealand.	AS/NZS 3112, AUS,NZL
626A/626AT, 771A/772AT, (optional)	AW-14007	115 VAC, 60 Hz, 10 A	NEMA 5-15 US
	WR-14012	230 VAC, 50 Hz, 10 A	CEE 7 EU
	AW-19521	250 VAC, 10 A	BS1363 UK
	AW-19587	100 VAC, 50/60 Hz, 3 A	JIS 8303, Japan
	AW-22235	250 VAC, 10 A	107-2-D1 Danish
	AW-24058	250 VAC, 10 A, Australia, New Zealand.	AS/NZS 3112, AUS,NZL

### Cycles

Model	Part Number	Power Cord Description	Configuration
525C, 525R, 625C, 625R, 770C, 770R, (optional)	AW-14007	115 VAC, 60Hz, 10 A	NEMA 5-15 US
	WR-14012	230 VAC, 50 Hz, 10 A	CEE 7, EU
	AW-20193	250 VAC, 10 A	BS1363 UK
	AW-20192	100 VAC, 50/60 Hz, 3 A	JIS 8303, Japan
	AW-22229	250 VAC, 10 A, Danish	107-2-D1 Danish
	AW-24058	250 VAC, 10 A, Australia, New Zealand.	AS/NZS 3112, AUS,NZL

### Treadmills

Model	Part Number	Power Cord Description	Configuration
525T, 625T, 770T, 790T	AW-24576	115 VAC, 60 Hz, 20 A, 6'	NEMA 5-20 US
	AW-20280	115 VAC, 60 Hz, 20 A, 13'	NEMA 5-20 US
	AW-20281	220 VAC, 60 Hz, 15 A	NEMA 6-15 US
	AW-20282	230 VAC, 50 Hz, 16 A	CEE 7, EU
	AW-20283	230 VAC, 50 Hz, 13 A	BS1363 UK
	AW-22228	250 VAC, 13 A	107-2-D1 Danish
	AW-24059	250 VAC, 15 A, Australia, New Zealand.	AS/NZS 3112, AUS,NZL

## ***Power Supplies***

Use only Cybex supplied power supplies if you wish to plug in Arc Trainers or Cycles. Plugging these products in will keep the display lit along with maintaining a charge on the internal batteries.

## ***Extension Cords***

Do not use an extension cord or power outlet strip to supply power to any Cybex product.